

# Walraven Heavy Duty Clamp HD500 (BUP1000)

(B 10 19)

for steel pipes 159 - 564 mm


G1"



## Features and Benefits

- two-part clamp with two locking bolts
- heavy design
- bolts secured with anti-loss washer
- with CO<sub>2</sub> welded connection nut
- material: steel
- surface protection:
  - product is part of the Walraven BIS UltraProtect® 1000 system
  - suitable for in- and outdoor applications
  - stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227

Part No.	D (mm)	D (")	DN	G	B (mm)	H (mm)	b x s (mm)	cs	F <sub>a,z</sub> (N)	Pack 1
33088169	159 - 169	6	-	G1"	241	200	38 x 4.0	M10	8,200	15
33088183	173 - 183	-	-	G1"	255	214	38 x 4.0	M10	8,200	15
33088202	192 - 202	-	-	G1"	274	233	38 x 4.0	M10	8,200	15
33088227	217 - 227	8	200	G1"	299	258	38 x 4.0	M10	8,200	2
33088254	244 - 254	-	-	G1"	335	258	38 x 4.0	M12	8,200	2
33088289	279 - 289	-	-	G1"	368	319	48 x 5.0	M12	12,000	2
33088325	315 - 325	12	300	G1"	404	355	48 x 5.0	M12	12,000	2
33088360	350 - 360	14	350	G1"	440	390	48 x 5.0	M12	12,000	2
33088408	398 - 408	16	400	G1"	488	438	48 x 5.0	M12	12,000	2
33088458	448 - 458	18	450	G1"	538	488	48 x 5.0	M12	12,000	2
33088509	499 - 509	20	500	G1"	589	539	48 x 5.0	M12	12,000	2
33088564	554 - 564	-	-	G1"	644	594	48 x 5.0	M12	12,000	2

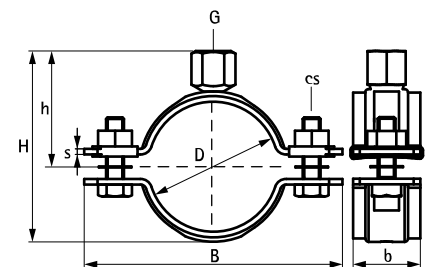

### Complementary

Walraven RapidStrut® Fixing System  
Walraven Fixing Accessories  
Walraven Fastenings

### Complementary

BIS Silicone Profile  
Walraven Threaded Tube