

# Walraven RapidStrut® Fixing Rail Double (hdg)

(H 04 45)

for medium weight fixing applications




## Features and Benefits

- universal rail system
- with continuous perforation
- a continuous graduated centimetre scale on one side
- inward formed flanges with serrated profile for extra grip
- material: steel 1.0332
- strut 41x41x2.5 and above tested for fire safety
- for more information about the max. allowed load ( $F_{a,z}$ ) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'



Part No.	L	B	H	s	S	BndS	App.
		(mm)	(mm)	(mm)	(mm)		
6501646	6 m	41	82 (41x2)	2.50	22	150	m.
6501666	6 m	41	124 (62x2)	2.50	22	90	m.

*Strut 82 (41x2) and above tested for fire safety.  
For more information about the max. allowed load ( $F_{a,z}$ ) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'.*

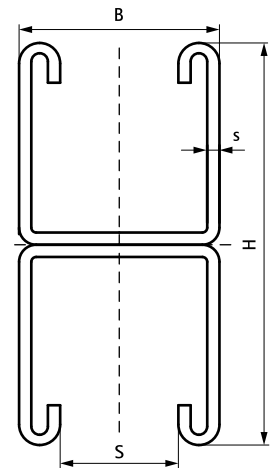

### Complementary

Walraven Strut Slide Nut (hdg)

### Alternative

Walraven RapidStrut® Fixing Rail DS 5 (BUP1000)