

Walraven RapidStrut® Stainless Steel Channel

(M 45 05)

suspension and support



6507X27


6507X47

Features and Benefits

- universal rail system
- distance between rail end and first hole is always equal
- a continuous graduated centimetre scale on one side
- inward formed flanges with serrated profile for extra grip
- Walraven RapidStrut® channels 41x41x2.5 tested for fire safety according to EN 1363-1
- for more information about the max. allowed load ($F_{a,2}$) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'
- material: stainless steel 1.4404 (AISI 316L)



| Part No. | L | B | H | s | S | Pack 1 | BndS | BndL |
|----------|-----|------|------|------|------|--------|------|------|
| | | (mm) | (mm) | (mm) | (mm) | | | |
| 6507327 | 3 m | 41 | 21 | 2.50 | 22 | 3 | 150 | - |
| 6507627 | 6 m | 41 | 21 | 2.50 | 22 | 6 | 300 | - |
| 6507347 | 3 m | 41 | 41 | 2.50 | 22 | 3 | 150 | - |
| 6507647 | 6 m | 41 | 41 | 2.50 | 22 | 6 | 60 | 300 |

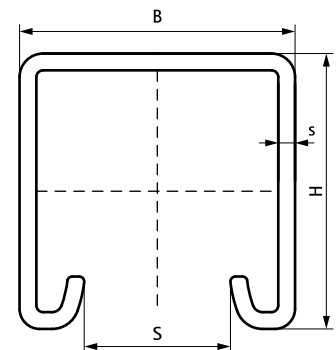

Complementary

- Walraven RapidStrut® Stainless Steel Slide Nut G2
- Walraven RapidStrut® Stainless Steel Slide Nut with Tabs
- BIS Strut Stainless Steel Tee-Bolt

Complementary

- Walraven RapidStrut® Stainless Steel Base Plate G2