

Walraven RapidStrut® Stainless Steel Fixing Rail

(M 45 05)

suspension and support




6507X27

6507X47

Features and Benefits

- universal rail system
- distance between rail end and first hole is always equal
- a continuous graduated centimetre scale on one side
- inward formed flanges with serrated profile for extra grip
- for more information about the max. allowed load ($F_{a,z}$) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'
- material: stainless steel 1.4404 (AISI 316L)

Part No.	L	B (mm)	H (mm)	s (mm)	S (mm)	Pack 1	BndS	BndL
6507327	3 m	41	21	2.50	22	3	150	-
6507627	6 m	41	21	2.50	22	6	300	-
6507347	3 m	41	41	2.50	22	3	150	-
6507647	6 m	41	41	2.50	22	6	60	300

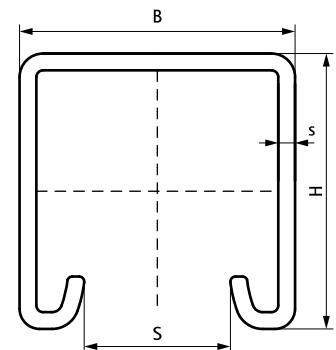

Complementary

- Walraven RapidStrut® Stainless Steel Slide Nut G2
- Walraven RapidStrut® Stainless Steel Slide Nut with Tabs
- BIS Strut Stainless Steel Tee-Bolt

Complementary

- Walraven RapidStrut® Stainless Steel Base Plate G2