

# Walraven VibraTek® PR-T Rubber Tile Pad


(L2 05 72)

a versatile rubber tile pad for general vibroacoustic isolation applications



## Features and Benefits

- ideal for use as an elastic isolating support for equipment and metal structures
- individual 50x50mm pieces can be easily cut to form required support shape
- transforms to elastic base support when used with a hexagon head screw
- hardness 45 shore A
- working temperature range -20 °C till 90 °C
- reusable in the event of machine relocation
- simple to cut and install
- supplied as a mat of 64 blocks (8x8) joined by a membrane

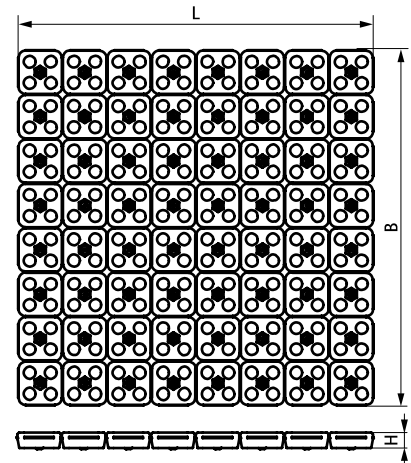

Part No.	L	B	H	Min. Load	Max. Load	Min. Optimal Load	Max. Optimal Load	Max. Deflection	Pack 1
		(mm)	(mm)	(N)	(N)	(N)	(N)	(mm)	
2801200400	411.2 mm	411.2	18	2,500	74,000	9,000	52,000	4.5	5
*	50 mm	50	18	39	1,156	140	812	4.5	-

\* Performance indication per single 50x50mm rubber tile.  
See Product Data Sheet for further technical information.