

# Walraven VibraTek® SA-1 Silent Absorber


(L2 05 48)

silent rubber absorber for isolating metal to metal contact



## Features and Benefits

- a versatile viscoelastic rubber absorber for preventing metal-to-metal contact in joined or fastened surfaces
- simple installation
- with  $\varnothing$  8mm hole for use with M8 threaded rods
- working temperature range -20 °C till 90 °C
- prevents transmission of vibration and noise

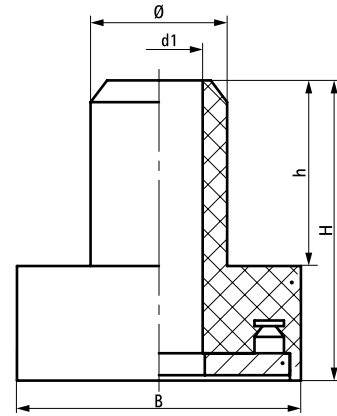

Part No.	B (mm)	H (mm)	h (mm)	d1 (mm)	Ø (mm)	Min. Load (N)	Max. Load (N)	Min. Optimal Load (N)	Max. Optimal Load (N)	Max. Deflection (mm)	Pack 1
2800900300	Ø 26	27.5	17	Ø 8	12.5	5	300	10	180	3.0	400