

# Walraven VibraTek® SA-2 Silent Absorber


(L2 05 51)

silent rubber absorber for isolating metal to metal contact



## Features and Benefits

- a versatile viscoelastic rubber absorber for preventing metal-to-metal contact in joined or fastened surfaces
- prevents transmission of vibration and noise
- simple installation
- with  $\varnothing$  14mm hole for use with M10 and M12 threaded rods
- working temperature range -20 °C till 90 °C

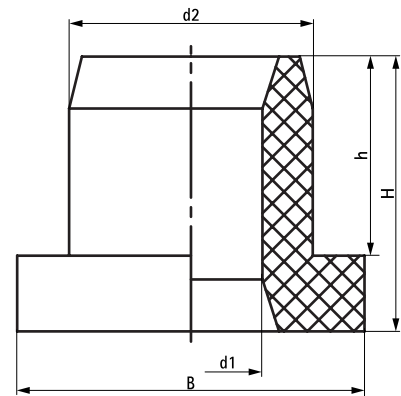

Part No.	B (mm)	H (mm)	h (mm)	d1 (mm)	d2 (mm)	Min. Load (N)	Max. Load (N)	Min. Optimal Load (N)	Max. Optimal Load (N)	Max. Deflection (mm)	Pack 1
2801000300	$\varnothing$ 33.5	26.5	19.2	$\varnothing$ 13.8	23.5	10	300	10	250	3.0	200