

## Walraven VibraTek® SB-FF Silentblock


(L2 05 66)

a rubber silentblock with two internal threads



### Features and Benefits

- a universal rubber absorber, ideal for use with all kinds of elastic suspension or mounting of equipment
- ideal for use with machinery and equipment mounted on metallic surface
- for use in compression only
- SB-FF with two internal threads
- working temperature range -20 °C till 90 °C
- available in four configurations: (1) SB-MM with two external threads, (2) SB-MF with one external and one internal thread, (3) SB-FF with two internal threads, and (4) SB-M with one external thread and a rubber base

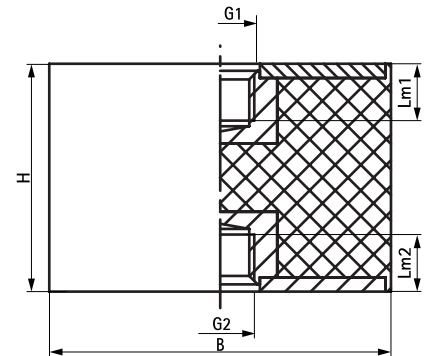

Part No.	B (mm)	H (mm)	G1	G2	Lm1 (mm)	Lm2 (mm)	Max. Optimal Load (N)	Max. Deflection (mm)	Pack 1
2801600181	20	20	M8	M8	6	6	180	2.0	100
2801600291	25	20	M8	M8	6	6	290	2.0	100
2801600420	30	25	M8	M8	7	7	420	2.5	100
2801600750	40	40	M8	M8	7	7	750	4.0	100
2801601170	50	40	M10	M10	7	7	1,170	4.0	50
2801601690	60	40	M12	M12	10	10	1,690	4.0	100