
# walraven

(10454)

# Walraven Yeti<sup>®</sup> 130 Cable Tray Set (BUP1000)

for installation of cable runs on roofs

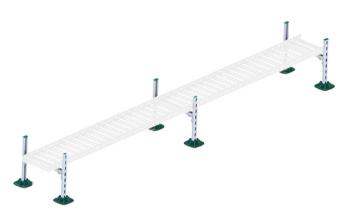

### Features and Benefits

- complete set for cable run installations on **surface** protection: the roof
- flexible and cost-effective solution
- also possible to use for pipes or small air duct channels
- with non-slip anti-vibration mat
- predefined load capacity: calculation not necessary
- mouldings made of WPC, a composite of sound reduction recycled plastic and wood fibre
- plastic components made from 100% recycled material
- resistant to UV and chemical influences
- UV-resistance according to EN ISO 16474-3:2014-02 - certified by ITB


- product is part of the Walraven BIS UltraProtect<sup>®</sup> 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227

Part No. 67685534 consisting of:


- 6 x BIS Yeti<sup>®</sup> 130 including non-slip anti-vibration mat (made of rubber)
- 9 x 0.4 m BIS RapidStrut<sup>®</sup> Fixing Rail 41x21 (BUP1000), cut to length and deburred
- 6 x BIS RapidStrut<sup>®</sup> 90° Connector, pre-assembled ready to use
- 6 x BIS RapidStrut<sup>®</sup> Endcaps

		_				
Part No.	Model	В	b3	h	F <sub>a,z</sub>	Pack 1
		(mm)	(mm)	(mm)	(N)	
67685534	BIS Yeti <sup>®</sup> 130 Cable Tray Set 400	551	400	400	1,500	1
Maximum load ( $F_{a,z}$ ) depends on the load capacity of the trapezium shaped roofing sheet. Before mounting, the roof load capacity has to be confirmed by a structural engineer. If changes to the mounting parameters is necessary then please contact Walraven Technical Department.						









### Complementary

Walraven Strut T-shape Base Plate (BUP1000) Walraven RapidStrut<sup>®</sup> Fixing Rail (BUP1000) Walraven Strut Connector 90° (BLIP1000)

#### Complementary

Walraven Yeti® Triplex Separation Layer