


Walraven Yeti® 280 Support System
for Rooftop Installations

(I 04 30)




Features and Benefits

- modular supporting system for HVAC equipment, solar panels, walkways, pipe work, cable runs, etc.
- for flat roofs
- for vertical rail adaption (RapidStrut 41x41)
- with non-slip anti-vibration mat
- mouldings made of WPC, a composite of recycled plastic and wood fibre
- plastic components made from 100% recycled material
- noise reduction according to DIN EN ISO 10140-1 and DIN EN ISO 10140-3
- UV-resistance according to EN ISO 16474-3:2014-02 - certified by ITB
- Part No. 67685303 consisting of:
 - 2 x BIS Yeti® 280 including non-slip anti vibration mat (made of rubber)
 - 4 x BIS Strut Connector 90°
 - 8 x hexagon head bolts and slide nuts

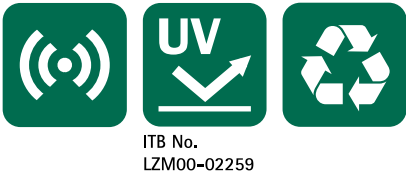

Part No.	Model	L	B (mm)	H (mm)	h (mm)	F _{a,z} (N)	Pack 1
67685280	BIS Yeti® 280 including mat	284 mm	284	58	8	12,500*	12
67685303	H-set (without Strut Rail)	284 mm	284	-	8	12,500*	1

* = Maximum allowed load for Strut 41x41x2.5.
For a detailed calculation and for support how to spread the load please contact Walraven Technical Support.
In cases where a foot is used in roof applications, the installer is obliged to verify maximum load capacity of roof before installation.

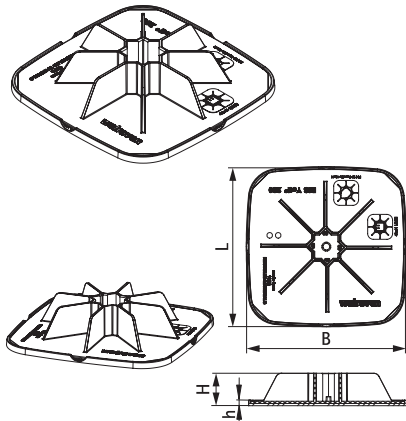

Complementary
Walraven Yeti® Triplex Separation Layer
Walraven RapidStrut® Fixing Rail
(BUP1000)