


Walraven Yeti® Triplex Separation Layer

(1 04 55)


for Rooftop Installations

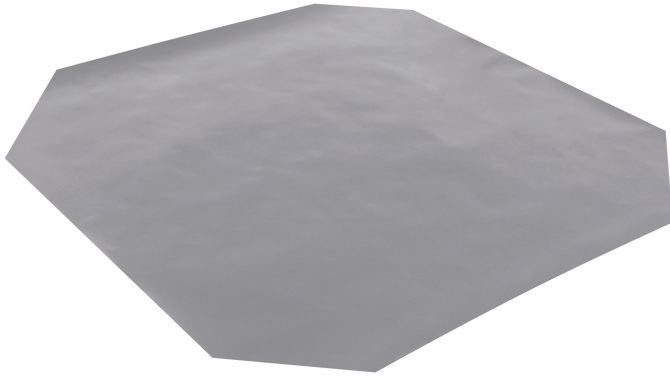

Features and Benefits

- 3-layer release and protection layer for use between BIS Yeti® and Ursus mounting foot and PVC roof
- size 350x350 by 1/4 pitch also suitable for BIS Yeti® 130
- high coefficient of static friction (between 0.400 and 0.500 depending on roof pitch and dry / wet condition)
- use on both sides possible
- to protect PVC roofs against plasticizer migration
- two standard dimensions for BIS Yeti® 480 and BIS Yeti® 335, all other BIS Yeti® and Ursus feet dimensions need to be adjusted by cropping
- material: HDPE film (black), aluminum foil, PET film (transparent)

| Part No. | L | B (mm) | Pack 1 | Pack 2 |
|----------|--------|-----------|--------|--------|
| 67685403 | 350 mm | 350 | 10 | 300 |
| 67685405 | 500 mm | 500 | 10 | 200 |

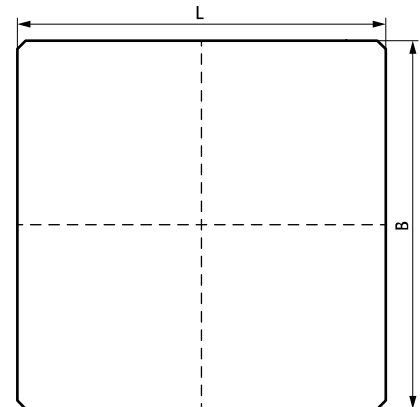

Complementary

Walraven Yeti® 480 Support System
 Walraven Yeti® 335 Support System
 Walraven Yeti® 335 Frame Set

Complementary

Walraven Yeti® 280 Support System