


starQuick® Fixing Nut

(C 05 65)

accessories BIS starQuick® Pipe Clamps without Nut

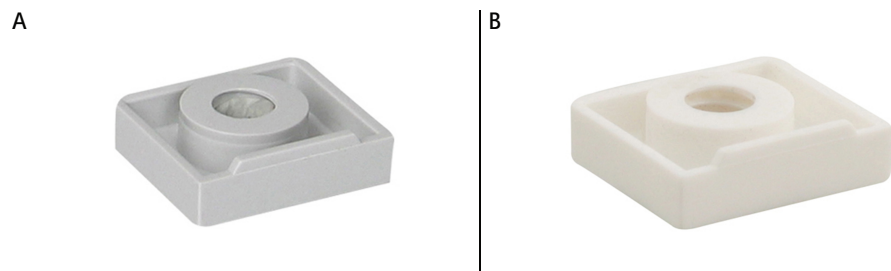

Features and Benefits

- to make a threaded connection in a starQuick® Clamp
- entirely integrated in clamp (not protruding)
- material: PC (polycarbonate), grey or white
- no corrosion
- temperature resistance from approx. -35 °C to approx. +110 °C (constant); short to approx. +125 °C

| Part No. | G | Colour | Pack 1 | Pack 2 |
|-----------|-----|------------------|--------|--------|
| A 0854006 | M6 | Grey (RAL 7035) | 100 | 1,000 |
| B 0855006 | M6 | White (RAL 9003) | 100 | 1,000 |
| A 0854007 | M7B | Grey (RAL 7035) | 100 | 1,000 |
| A 0854307 | M7F | Grey (RAL 7035) | 100 | 1,000 |
| A 0854308 | M8 | Grey (RAL 7035) | 100 | 1,000 |

M7B: pitch = M7 x 1 mm.
M7F: pitch = M7 x 1.5mm.

