


RapidRail® Fixing Rail

(G 04 05)

suspension and support

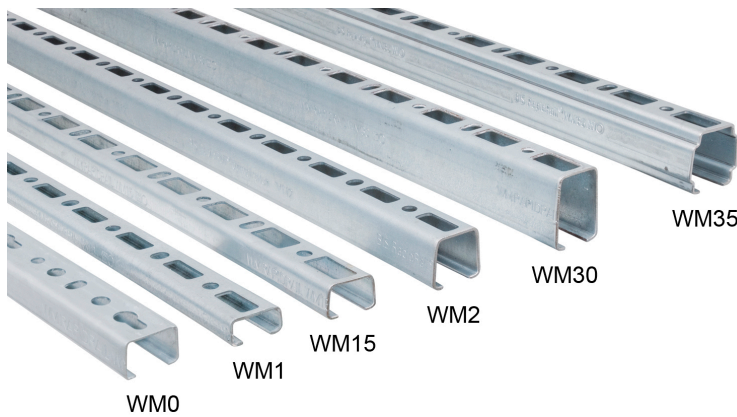

Features and benefits

- C-profile
- for a quick and easy fixing
- with continuous perforation
- distance between rail end and first hole is always equal
- unique perforation on rail WM15, WM30 and WM35 allows for hanging on both sides
- pre-galvanized
- a continuous graduated centimetre scale on one side
- material: steel 1.0242
- yield strength 240 N/mm²





RAL-GZ 655/C
Cert.Nr. 2012-03

Part No.	Type	L	B	H	s	S	RAL	BndS	BndL	App.
			(mm)	(mm)	(mm)	(mm)				
6505000	WM0	2 m	27	18	1.20	15	RAL ¹	20	400	m.
6505300	WM0	3 m	27	18	1.20	15	RAL ¹	30	600	m.
6505001	WM1	2 m	30	15	2.00	15	RAL ¹	20	480	m.
6505301	WM1	3 m	30	15	2.00	15	RAL ¹	30	720	m.
6505601	WM1	6 m	30	15	2.00	15	RAL ¹	60	720	m.
6505015	WM15	2 m	30	20	1.75	15	RAL ¹	20	480	m.
6505615	WM15	6 m	30	20	1.75	15	RAL ¹	60	720	m.
6505002	WM2	2 m	30	30	2.00	15	RAL ¹	20	400	m.
6505602	WM2	6 m	30	30	2.00	15	RAL ¹	60	600	m.
6505030	WM30	2 m	30	45	2.00	15	RAL ¹	20	240	m.
6505630	WM30	6 m	30	45	2.00	15	RAL ¹	60	360	m.
6505235	WM35	2 m	38	40	2.00	15	-	20	100	m.
6505335	WM35	3 m	38	40	2.00	15	-	30	150	m.
6505635	WM35	6 m	38	40	2.00	15	-	60	300	m.

RAL¹ = tested, certified and monitored by a third party according to RAL-GZ 655/C.

For detailed technical information about our RAL marked products, please see the RAL datasheet in our web catalogue.

For more information about the max. allowed load ($F_{0,2}$) please refer to the loading tables or our online datasheet 'Technical Details BIS RapidRail®'.

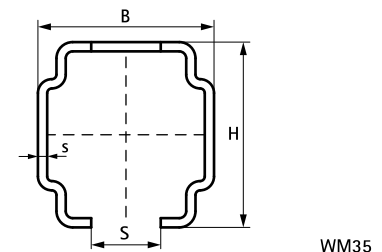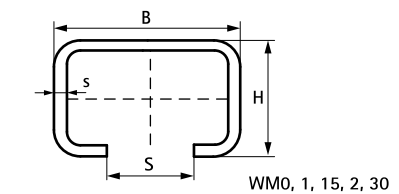

Complementary

- BIS RapidRail® Slide Nut
- BIS RapidRail® Hammerfix
- BIS Rail End Cap

Complementary

- BIS RapidRail® Connector 90°
- BIS RapidRail® Connector 135°