


# BIS Slide Block GFRP (BUP1000)


(E 10 45)

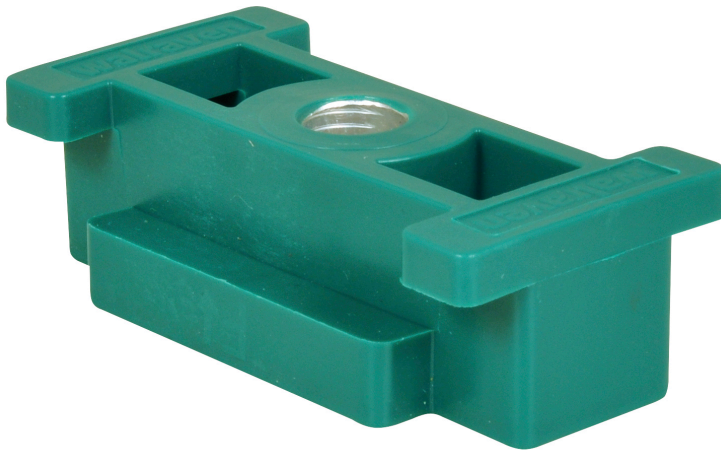

## Features and benefits

- flexible sliding element for pipe extensions
- can also be used as a cross-slide
- suitable for all BIS RapidStrut® Fixing Rail excluding DS5
- suitable for ceiling mounting (hanging) and floor mounting (standing mounted)
- very low installation height, little space requirement
- movement freely selectable, limitations and securing by U-washers
- material: hanger nut made of steel; plastic part made of Polyamide 6 (PA6), 30% glass fiber reinforced
- sliding friction coefficient  $\mu = 0,30$
- surface protection:
  - product is part of the Walraven BIS UltraProtect® 1000 system
  - suitable for in- and outdoor applications
  - stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- temperature resistance from -30 °C to +90 °C

Part No.	G	L	B (mm)	H (mm)	F <sub>a,z</sub> (N)	Pack 1
6662810	M10	70 mm	35	22	1,550	20

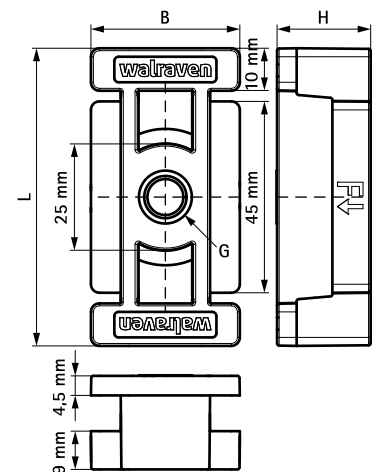

## Complementary

Walraven RapidStrut® Channel (BUP1000)  
 Walraven RapidStrut® Channel (pg)  
 Walraven Strut Washer - U-shaped (BUP1000)

## Alternative

BIS Expansion Device  
 BIS Expansion Joint