



BIS Vario® WC Basic 10

(W 13 05)

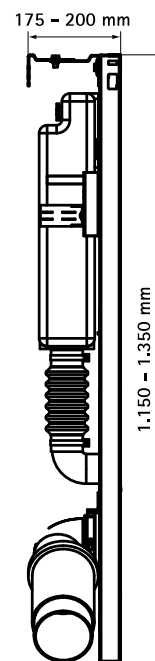

Features and benefits

- 10 cm mechanical height adjustable WC-pre-wall system
- pre-wall component with Geberit flushing cistern
- especially suitable for clinical and care establishments as well as for multigenerational households
- height adjustable, even after installation and finishing
- Frame:
 - WC-connection kit DN 100
 - plastic cover plate, white
 - fixing material for wall and floor
 - drill template
- 100 mm adjustable (20 mm upwards, 80 mm downwards) with a ratchet spanner (not included)
- 200 mm in height adjustable floor supports
- 25 mm in depth adjustable wall supports
- loading capacity: 400 kg (tested in accordance with NF X41002, XPD12-208)
- material: steel, epoxy coated
- Flushing cistern:
 - make: Geberit, type UP320
 - duo-flush technology, flushing volume 3/6 litre (standard), adjustable to 4/7.5 litre
 - front control
 - water connection 1/2"
 - 10 years guarantee (25 year spare part availability)
- Optional extra's:
 - infra-red WC-control BISMAT® SanTec Flush
 - manual controls: Geberit Control plates 2-button flush technology: Samba, Bolero, Twist, Sigma50 or Sigma20 Start/Stop: Sigma, Bolero, Samba or Tango

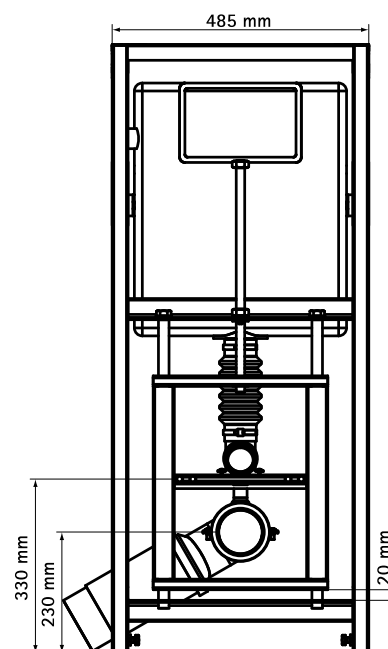

Part No.	Model	Drainage (mm)	Pack 1
0352510	Universal	110	1

Complementary

BIS Vario® WC Armrest Set
 BIS Vario® WC Basic Bowl