


Bifix® G2 with Lining (M10) (BUP1000)

(A 05 72)

for steel, copper, cast iron and plastic (multilayer) pipe 176 - 225 mm

M10

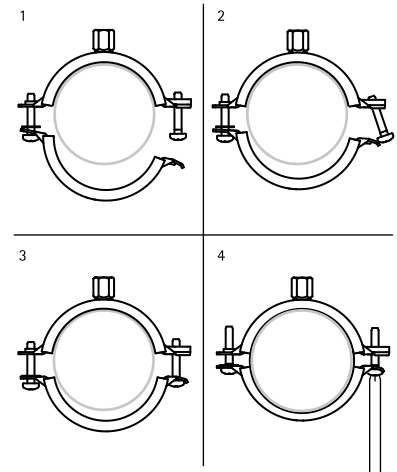

Features and benefits

- two-screw clamp
- quick closing mechanism for easy locking of the clamp with one hand
- 2 component rubber lining provides easy positioning of the pipe during installation
- when the clamp is closed, the pipe rests on soft black rubber lining for increased noise reduction
- suitable for steel, copper, cast iron and plastic (multilayer) pipe
- material: steel
- temperature resistance from -30 °C to +120 °C
- surface protection:
 - product is part of the BIS UltraProtect® 1000 system
 - suitable for in- and outdoor applications
 - stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- sound insulating lining according DIN 4109
- noise reduction according to ISO 3822-1 up to 23 dB(A)



Part No.	D (mm)	D (°)	DN	G	B (mm)	H (mm)	h (mm)	b x s (mm)	cs	F _{a,z} (N)	Pack 1
31285180	176 - 180	-	-	M10	238	201	109	25 x 2.50	M8	2,500	15
31285200	192 - 200	-	-	M10	257	230	119	25 x 2.50	M8	2,500	15
31285210	205 - 210	-	-	M10	269	241	125	25 x 2.50	M8	2,500	10
31285225	219 - 225	8	200	M10	283	257	132	25 x 2.50	M8	2,500	10

