


Pacifyre® MK II Fire Sleeve (P)


(U 04 05)

for penetrations of plastic pipes (non-insulated) 15 - 164 mm

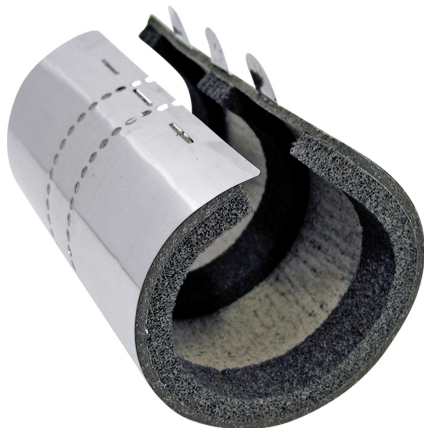


Features and benefits

- for pipe penetrations in accordance with e.g. DIN 4102-11 or DIN EN 1366-3 in walls (solid walls or light partition walls) and ceilings with fire protection requirements
- the sleeve provides a guaranteed protection against fire, smoke and noise
- expansion and contraction of the pipe remains possible
- minimum space required, therefore can be applied in areas of hard accessibility
- a higher flexibility due to minimal overhang on wall and ceiling seals
- no tools, drilling or extra fixing materials needed
- simple and easy to install
- maintenance free
- noise reduction test report from IRB (Fraunhofer Institut - Germany) available
- tested according to EN 1366-3
- in accordance with many EU country building regulations



| Part No. | D (mm) | DN | d (mm) | Pack 1 | Pack 2 |
|--------------|-----------|-----|-----------|--------|--------|
| 215 1 015017 | 15 - 17 | 15 | 40 | 1 | 9 |
| 215 1 018020 | 18 - 20 | 20 | 45 | 1 | 9 |
| 215 4 024026 | 23 - 28 | 25 | 50 | 1 | 9 |
| 215 4 030032 | 29 - 36 | 32 | 55 | 1 | 9 |
| 215 4 039041 | 38 - 44 | 40 | 65 | 1 | 8 |
| 215 4 048050 | 46 - 52 | 50 | 75 | 1 | 8 |
| 215 4 051053 | 48 - 55 | 52 | 75 | 1 | 8 |
| 215 4 054056 | 52 - 58 | 56 | 80 | 1 | 8 |
| 215 4 057059 | 55 - 61 | 58 | 85 | 1 | 8 |
| 215 4 063065 | 61 - 67 | 63 | 90 | 1 | 8 |
| 215 4 075077 | 70 - 79 | 75 | 100 | 1 | 6 |
| 215 4 078080 | 74 - 82 | 80 | 105 | 1 | 6 |
| 215 4 090092 | 86 - 94 | 90 | 115 | 1 | 6 |
| 215 4 108110 | 104 - 113 | 110 | 135 | 1 | 6 |
| 215 8 123125 | 120 - 128 | 125 | 160 | 1 | 5 |
| 215 8 159161 | 155 - 164 | 160 | 195 | 1 | 5 |

For Pacifyre® MK II Fire Sleeves in other sizes, please contact your Walraven Sales Company.

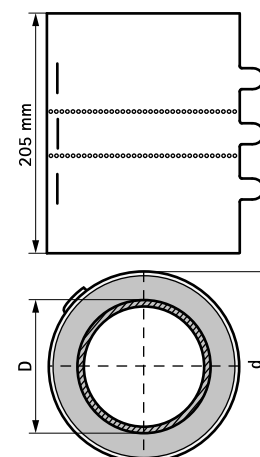

Complementary

Tangit FP 550 2C Fire Protection Foam
Tangit FP 800 Fire Protection Coating
Pacifyre® FPM

Complementary

Pacifyre® ID-Card