
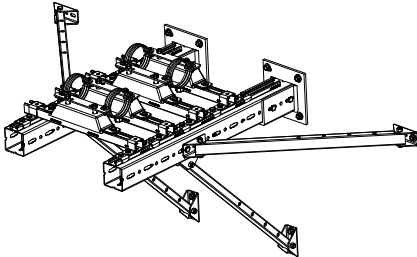


Walraven Flexible Rail Prop

reinforcement of rail fabrications

(H 16 07)

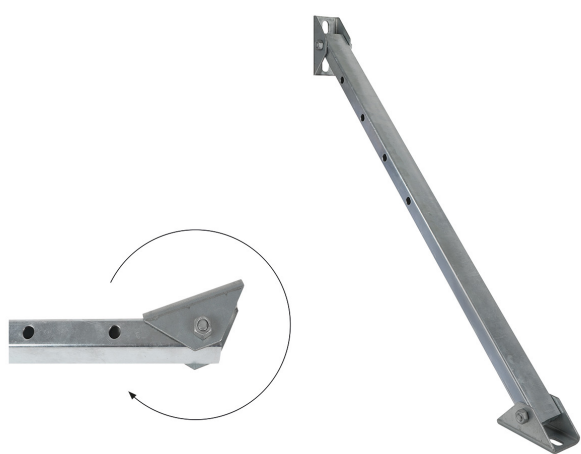


Features and benefits

- flexible angle support bracket
- to strengthen rail constructions
- by additional holes the length can be reduced in steps of 100mm
- suitable for Strut rails and for Maxx rails
- material: u-plate steel 1.0242 (S250GD);
- tube profile: steel 1.0038 (S235JR)
- u-plate: ZM310-MAC (pre-galvanized);
- tube profile: hot-dip galvanized 50-80 µm

| Part No. | L   | B<br>(mm) | H<br>(mm) | d1<br>(mm) | k<br>(mm) | Fa,z<br>(N) | Pack 1 |
|----------|-----|-----------|-----------|------------|-----------|-------------|--------|
| 6621083  | 929 | 83        | 92        | 25 x 12.2  | 70.6      | 7,500       | -      |

The (Fa,z) value is the safe load in axial direction (tension or compression) that the product can withstand in its longest version (uncutted) without damaging the connection holes or buckling the rail.

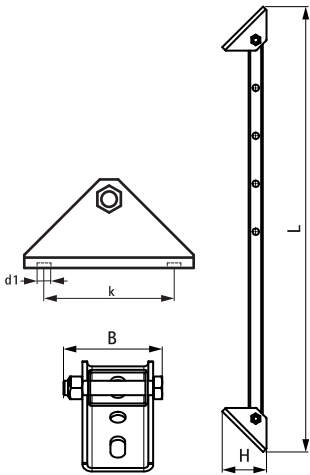

Complementary

Walraven RapidStrut® Fixing Rail (pg)  
Walraven RapidStrut® Fixing Rail Double (pg)  
WTB1 Throughbolt Anchor

Alternative

Walraven Rail Prop (BUP1000)