


Walraven RapidStrut® Ball Swivel Hanger

(H 24 75)

fixing to Strut rail

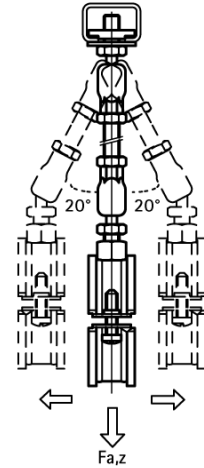



Features and benefits

- slide nut with ball swivel hanger, washer and BIS RapidStrut® spring
- recommended for metal pipes up to DN 50, plastic pipes up to DN 100
- ready-to-use pre-assembled for a quick fixing, and retains assembly in place before final tightening
- with inspection hole to check screw-in depth (attention: when the threaded rod is screwed-in too deep, the ball swivel is blocked)
- screw-in depth is continuously variable (see LU)
- tested for fire safety according to EN 1363-1
- material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
- zinc plated



| Part No. | G | L | LU | s | Lm1 | SW1 | SW2 | T _(inst.) | For Rail | F _{a,z} | Pack 1 |
|----------|-----|-------|------|------|------|------|------|----------------------|----------|------------------|--------|
| | | | (mm) | (mm) | (mm) | (mm) | (mm) | (Nm) | | (N) | |
| 66530805 | M8 | 80 mm | 43 | 6.0 | 50 | 13 | 10 | 15.0 | Strut | 3,100 | 25 |
| 66530005 | M10 | 80 mm | 43 | 8.0 | 50 | 13 | 12 | 15.0 | Strut | 3,100 | 25 |

Please note. Always use 2 ball swivel hangers and secure by additional hexagon nut (see application picture). The maximum length change that can be dealt with, depends on the fixing distance (ceiling - pipe). The height difference that occurs as a result, needs to be taken into consideration. To be used in combination with BIS Ball Swivel Hangers. Product can be found on page E 10 05.

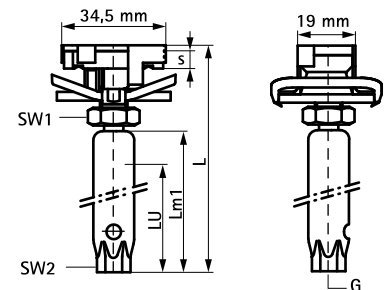

Complementary

BIS Ball Swivel Hanger
Walraven RapidStrut® Fixing Rail DS 5
(BUP1000)