


Walraven RapidStrut® Stainless Steel Fixing Rail

(M 45 10)

for suspension and support

Double

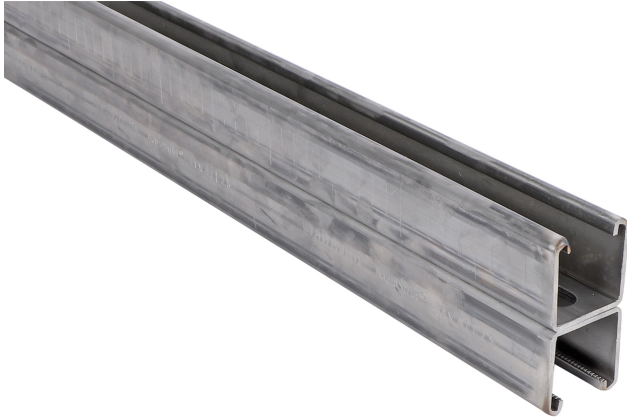

Features and benefits

- universal rail system
- distance between rail end and first hole is always equal
- a continuous graduated centimetre scale on one side
- inward formed flanges with serrated profile for extra grip
- material: stainless steel 1.4404 (AISI 316L)
- for more information about the max. allowed load ($F_{a,z}$) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'

Part No.	L	B (mm)	H (mm)	s (mm)	S (mm)	BndS
6507646	6 m	41	82 (41 x 2)	2.50	22	150

