

Walraven VibraTek[®] SB-MM Silentblock


(L2 05 60)

a rubber silentblock with two external threads



Features and benefits

- a universal rubber absorber, ideal for use with all kinds of elastic suspension or mounting of equipment
- ideal for use with machinery and equipment mounted on metallic surface
- for use in compression only
- SB-MM with two external threads
- working temperature range -20 °C till 90 °C
- available in four configurations: (1) SB-MM with two external threads, (2) SB-MF with one external and one internal thread, (3) SB-FF with two internal threads, and (4) SB-M with one external thread and a rubber base

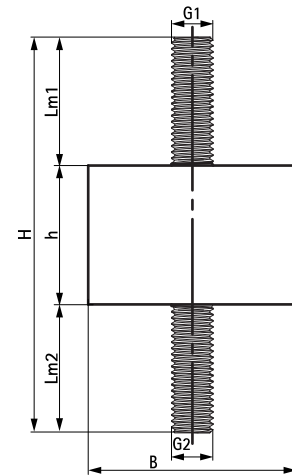

Part No.	B (mm)	H (mm)	h (mm)	G1	G2	Lm1 (mm)	Lm2 (mm)	Max. Optimal Load (N)	Max. Deflection (mm)	Pack 1
2801400181	20	56	20	M8	M8	18	18	180	2.0	100
2801400291	25	56	20	M8	M8	18	18	290	2.0	100
2801400420	30	71	25	M8	M8	23	23	420	2.5	100
2801400750	40	86	40	M8	M8	23	23	750	4.0	100
2801401170	50	96	40	M10	M10	27	27	1,170	4.0	50
2801401690	60	114	40	M12	M12	37	37	1,690	4.0	50