

RapidRail® Fixing Rail

(G 04 05)

suspension and support




Features and benefits

- C-profile
- for quick and easy fixing
- with continuous perforation
- distance between rail end and first hole is always equal
- continuous graduated centimeter scale on one side
- pre-galvanized
- unique perforation on rail WM15 allows for hanging on both sides
- material: steel 1.0242
- yield stress 34,809 pounds/square inch

Part No.	Type	L	B (")	H (")	s (Ga)	S (")	BndS	BndL	App.
65059502	WM15	10"	1 3/16	3/4	16	5/8	20	-	ft
65059505	WM15	20"	1 3/16	3/4	16	5/8	10	-	ft
65059510	WM15	3' 3"	1 3/16	3/4	16	5/8	10	-	ft
6505015	WM15	6' 6"	1 3/16	3/4	16	5/8	10	240	ft.

RAL¹ = tested, certified and monitored by a third party according to RAL-GZ 655/C.

For more information about the max. allowed load ($F_{o,2}$) please refer to the loading tables or our online datasheet 'Technical Details BIS RapidRail®'.

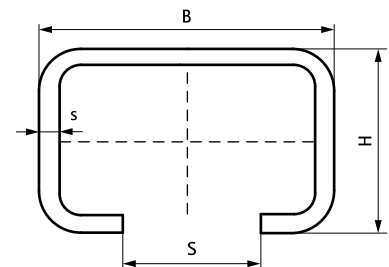

Complementary

- BIS Rail End Cap
- BIS RapidRail® Connector 90°
- BIS RapidRail® Connector 135°