



# In-Wall Strut WMO

(G 04 220)

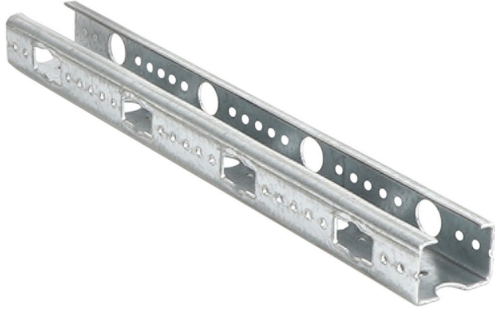

## Features and benefits

- once hung or mounted, this is used to support vertical or horizontal piping with attachments
- channel side fits RapidRail®, starQuick® and stub-out accessories
- pre-punched holes fit 3/8" threaded rod and angled wall bracket accessories
- pre-drilled holes allow for secure mounting of starQuick®, Rabbit clamp and BISMAT® clamps using a Quick Hanger Bolt
- material: steel 1.0226
- pre-galvanized



Part No.	Type	L	B (")	H (")	s (Ga)	S (")	Pack 1	App.
650509008	WMO	8"	1 1/6	5/7	18	5/8	25	pc.
650509012	WMO	12"	1 1/6	5/7	18	5/8	25	pc.
650509018	WMO	18"	1 1/6	5/7	18	5/8	25	pc.
650509022	WMO	22"	1 1/6	5/7	18	5/8	25	pc.
650509032	WMO	32"	1 1/6	5/7	18	5/8	25	pc.
650509000	WMO	7 ft.	1 1/6	5/7	18	5/8	-	pc.

