


Pacifyre[®] MK II Fire Sleeve (P)


for penetrations of plastic pipes (non-insulated) 15 - 164 mm

(U 04 05)

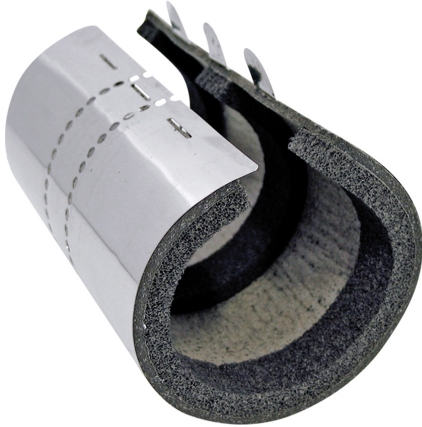

Features and benefits

- the sleeve provides a guaranteed protection against fire, smoke and noise
- expansion and contraction of the pipe remains possible
- minimum space required, therefore can be applied in areas of hard accessibility
- a higher flexibility due to minimal overhang on wall and ceiling seals
- no tools, drilling or extra fixing materials needed
- simple and easy to install
- maintenance free
- noise reduction test report from IRB (Fraunhofer Institut - Germany) available
- tested according to EN 1366-3
- in accordance with many EU country building regulations

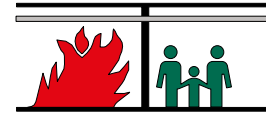

Part No.	D (mm)	D / CTS (°)	D / IPS (°)	Pack 1	Pack 2
215 1 015017	15 - 17	1/2	-	1	9
215 1 018020	18 - 20	5/8	-	1	9
215 4 024026	23 - 28	-	-	1	9
215 4 030032	29 - 36	-	-	1	9
215 4 039041	38 - 44	-	-	1	8
215 4 048050	46 - 52	-	1 1/2	1	8
215 4 054056	52 - 58	2	-	1	8
215 4 063065	61 - 67	-	2	1	8
215 4 075077	70 - 79	-	-	1	6
215 4 078080	74 - 82	3	-	1	6
215 4 090092	86 - 94	-	-	1	6
215 4 108110	104 - 113	-	-	1	6
215 8 123125	120 - 128	-	-	1	5
215 8 159161	155 - 164	-	-	1	5

For Pacifyre[®] MK II Fire Sleeves in other sizes, please contact your Walraven Sales Company.

