

# Walraven RapidRail® Fixing Rail

(G 04 05)

for light fixing applications




## Features and benefits

- C-profile
- for quick and easy fixing
- with continuous perforation
- distance between rail end and first hole is always equal
- continuous graduated centimeter scale on one side
- material: steel 1.0242
- pre-galvanized
- for more information about the max. allowed load ( $F_{a,z}$ ) please refer to the loading tables or our online datasheet 'Technical Details BIS RapidRail®'

Part No.	Type	L	B (")	H (")	s (Ga)	S (")	BndS	BndL	App.
65059502	WM15	10"	1 3/16	3/4	16	5/8	20	-	ft.
65059505	WM15	20"	1 3/16	3/4	16	5/8	10	-	ft.
65059510	WM15	3' 3"	1 3/16	3/4	16	5/8	10	-	ft.

*For more information about the max. allowed load ( $F_{a,z}$ ) please refer to the loading tables or our online datasheet 'Technical Details BIS RapidRail®'.*

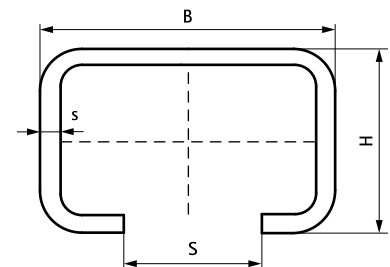

## Complementary

- Walraven Rail End Cap
- Walraven RapidRail® Connector 90°
- Walraven RapidRail® Connector 135°