


BIS Bifix® 412

para conductos de aire Ø 63 - 400 mm

M8


(F 15 05)

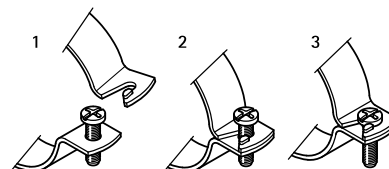

Características y ventajas

- abrazadera con doble rosca
- con sistema de cierre rápido
- material: acero
- acero pregalvanizado

Pieza N°	D (mm)	G	B (mm)	H (mm)	h (mm)	b x s (mm)	F _{az} (N)	U.m.v.1
4125080	80	M8	127	99	54	25 x 1,5	850	25
4125100	100	M8	147	119	64	25 x 1,5	850	25
4125125	125	M8	172	144	77	25 x 1,5	850	25
4125150	150	M8	197	169	89	25 x 1,5	850	25
4125160	160	M8	207	179	94	25 x 1,5	850	25
4125180	180	M8	227	199	104	25 x 1,5	850	25
4125200	200	M8	247	219	114	25 x 1,5	850	25
4125250	250	M8	297	269	139	25 x 1,5	850	25
4125300	300	M8	347	319	164	25 x 1,5	850	25
4125315	315	M8	361	334	171	25 x 1,5	850	25
4125355	355	M8	402	374	187	25 x 1,5	850	25
4125400	400	M8	446	419	214	25 x 1,5	850	20

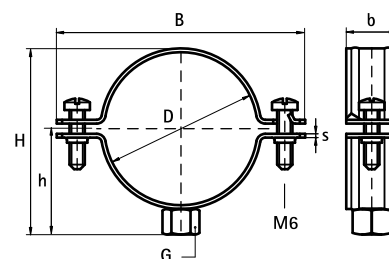

Complementarios

Walraven RapidRail® Sistemas de Fijación
 Walraven Accesorios de fijación
 Walraven Fijaciones