


# BIS Manguitos roscados en acero inox

ajuste para conexión roscada

(M 90 10)

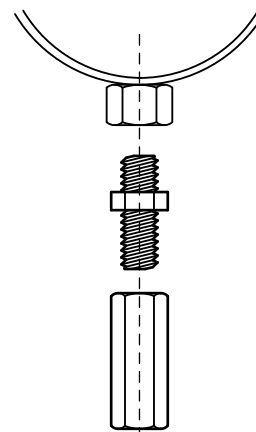

## Características y ventajas

- para conectar 2 elementos roscados
- material: acero inoxidable 1.4301 (AISI 304)

Pieza N°	G	L	SW1 (mm)	F <sub>a,z</sub> (N)	U.m.v.1	ud/pc
6457625	M6	25 mm	10	11.800	100	180,63
6457830	M8	30 mm	13	21.400	100	347,84
6457930	M10	30 mm	17	27.000	50	441,42
6457240	M12	40 mm	19	30.300	50	836,54
64571648	M16	48 mm	24	-	50	180,63

