
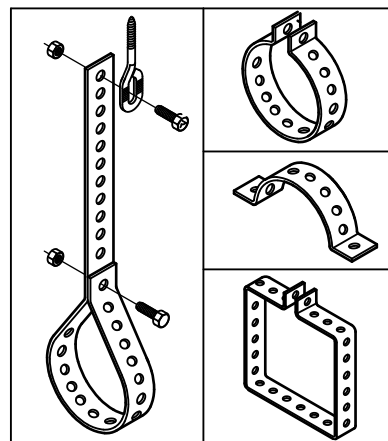


# BIS Cinta de suspensión zincada

(K 05 05)



fijación de tuberías y conductos de aire

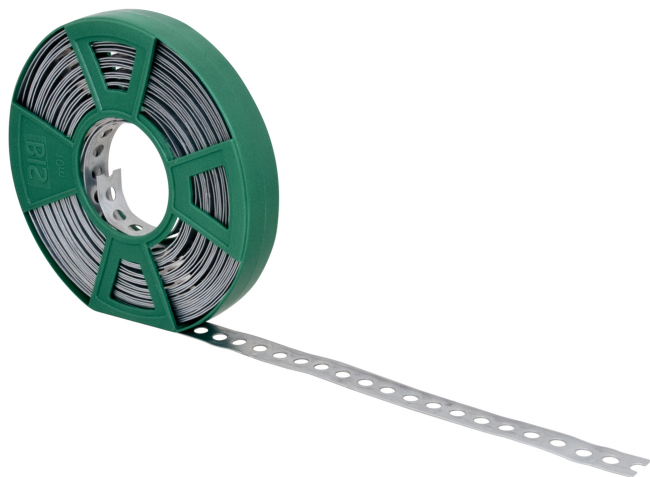

## Características y ventajas

- con perforación continua
- material: acero
- acero pregalvanizado

Pieza N°	Tipo	L	b x s (mm)	d1 (mm)	k (mm)	F <sub>a,z</sub> (N)	U.m.v.1	Unid.
0830012	5055	10 m	12 x 1,0	5,0	8,0	1.050	10	pza.
0830017	5055	10 m	17 x 1,0	7,0	12,0	1.500	10	pza.
0830117	5055	10 m	17 x 1,0	6,5	15,0	1.290	10	pza.
0831012	5055L	10 m	12 x 0,8	5,0	8,0	840	10	pza.
0831017	5055L	10 m	17 x 0,8	7,0	12,0	1.070	10	pza.
0831026	5055L	10 m	26 x 1,0	8,5	14,0	2.620	1	pza.

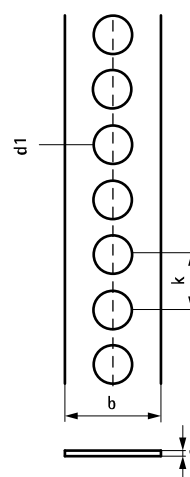

### Complementarios

- BIS Cánkamos de suspensión con rosca interior
- BIS Clavos de mampostería
- BIS Cánkamos de suspensión

### Complementarios

- BIS Cánkamos con rosca métrica
- BIS HK