


Walraven Manguitos roscados hexagonales – 390

(K 55 30)


conexión con tornillos de soporte



Características y ventajas

- para conectar 2 elementos roscados
- material: acero
- acero zincado

Pieza N°	G	L	SW1 (mm)	F _{a,z} (N)	U.m.v.1	U.m.v.2	ud/pc
6453625	M6	25 mm	10	11.900	100	1.000	33,54
6453830	M8	30 mm	11	18.100	100	1.000	50,16
6453930	M10	30 mm	13	20.900	50	500	66,87
6453940	M10	40 mm	13	20.400	50	1.000	106,53
6453240	M12	40 mm	17	23.000	50	400	124,20
6453016	M16	48 mm	24	30.300	200	-	498,87

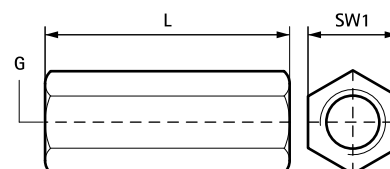

Alternativos

Walraven Manguitos roscados hexagonales (BUP1000)