

BIS Extra teške obujmice HD1501 (BUP1000)

(A 10 09)

za metalne cijevi 15 - 509 mm

G¹/₂"



Prednosti i osobine

- dvodijelna obujmica sa dva vijka za zatvaranje
- do veličine 5": navojnica za zatvaranje u PVC kućištu
- izvedba obujmice za teška opterećenja
- spojni vijci osigurani protiv ispadanja sa PE pločicom
- sa CO₂-zavarenom priključnom navojnicom
- materijal: čelik
- zvučno izolacione osobine po DIN-u 4109
- zaštita materijala:
 - proizvod je deo BIS UltraProtect® sistema
 - pogodan za unutrašnju i spoljašnju upotrebu
 - izdržava min. 1 000 sati sonog sprej testa (max. 5% crvene rdje) prema ISO standardu 9227
- zvučno izolacioni uložak od EPDM-gume, crne boje
- po upitu: silikonski zvučno izolacioni uložak, postojan na temperaturu do +200 °C (A 35 15)
- gumeni uložak postojan na starenje
- testirano na vatrootpornost, test raport po upitu



RAL-GZ 655/B
Cert.Nr. 2011-12a




RAL-GZ 656
Cert.Nr. 2011-14

Art.br.	D (mm)	D (")	DN	G	B (mm)	H (mm)	h (mm)	b x s (mm)	cs	F _{a,z} (N)	RAL	KK
3317 8 019	15 - 19	3/8	10	G ¹ / ₂ "	81	50	30	30 x 2,5	M8	1.500	RAL ²	25
3317 8 023	19 - 23	1/2	15	G ¹ / ₂ "	84	53	32	30 x 2,5	M8	1.500	RAL ²	25
3317 8 029	25 - 29	3/4	20	G ¹ / ₂ "	91	59	35	30 x 2,5	M8	1.500	RAL ²	25
3317 8 035	30 - 35	1	25	G ¹ / ₂ "	98	65	38	30 x 2,5	M8	1.500	RAL ²	25
3317 8 045	40 - 45	1 1/4	32	G ¹ / ₂ "	109	75	43	30 x 2,5	M8	1.500	RAL ²	25
3317 8 051	46 - 51	1 1/2	40	G ¹ / ₂ "	115	81	46	30 x 2,5	M8	1.500	RAL ²	25
3317 8 064	59 - 64	2	50	G ¹ / ₂ "	129	94	53	30 x 2,5	M8	1.500	RAL ²	25
3317 8 078	72 - 78	2 1/2	65	G ¹ / ₂ "	144	109	60	30 x 3,0	M8	2.300	RAL ²	25
3317 8 085	79 - 85	-	-	G ¹ / ₂ "	152	116	64	30 x 3,0	M8	2.300	RAL ²	25
3317 8 092	86 - 92	3	80	G ¹ / ₂ "	159	123	68	30 x 3,0	M8	2.300	RAL ²	25
3317 8 109	101 - 109	-	-	G ¹ / ₂ "	175	140	74	30 x 3,0	M8	2.300	RAL ²	25
3317 8 116	108 - 116	4	100	G ¹ / ₂ "	182	147	79	30 x 3,0	M8	2.300	RAL ²	25
3317 8 133	125 - 133	-	-	G ¹ / ₂ "	200	164	86	30 x 3,0	M8	2.300	RAL ²	25
3317 8 140	132 - 140	5	125	G ¹ / ₂ "	207	171	91	30 x 3,0	M8	2.300	RAL ²	15
3317 8 169	159 - 169	6	150	G ¹ / ₂ "	254	210	110	38 x 4,0	M10	3.800	RAL ²	15
3317 8 188	178 - 188	-	-	G ¹ / ₂ "	274	229	120	38 x 4,0	M10	3.800	RAL ²	15
3317 8 204	194 - 204	-	-	G ¹ / ₂ "	290	245	128	38 x 4,0	M10	3.800	RAL ²	15
3317 8 227	217 - 227	8	200	G ¹ / ₂ "	322	268	140	38 x 4,0	M10	3.800	RAL ²	2
3317 8 275	265 - 275	10	250	G ¹ / ₂ "	367	317	165	48 x 5,0	M12	9.200	RAL ¹	2
3317 8 325	315 - 325	12	300	G ¹ / ₂ "	414	364	188	48 x 5,0	M12	9.200	RAL ¹	2
3317 8 364	354 - 364	14	350	G ¹ / ₂ "	453	402	207	48 x 5,0	M12	9.200	RAL ¹	2
3317 8 408	398 - 408	16	400	G ¹ / ₂ "	497	446	229	48 x 5,0	M12	9.200	RAL ¹	2
3317 8 458	448 - 458	18	450	G ¹ / ₂ "	548	496	254	48 x 5,0	M12	9.200	RAL ¹	2
3317 8 509	499 - 509	20	500	G ¹ / ₂ "	599	547	279	48 x 5,0	M12	9.200	RAL ¹	2

RAL¹ = testiran, sertifikovan i eksterno kontrolisan prema RAL-GZ 655/B.

RAL² = testiran, sertifikovan i eksterno kontrolisan prema RAL-GZ 655/B i RAL-GZ 656.

Za detaljne tehničke informacije o našim proizvodima sa RAL sertifikatom, pogledajte RAL datasheet na našoj veb stranici.

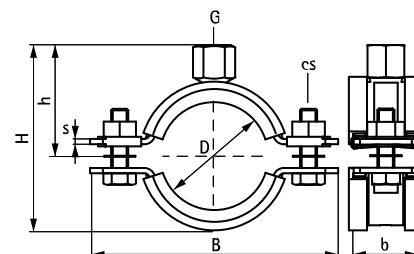

Kompetabilno

BIS RapidStrut® Sistem za pričvršćivanje
BIS Dodatci za montažu
BIS Dodatci za pričvršćivanje

Kompetabilno

BIS Silikonski profili
BIS Navojne cijevi