


BIS Profilna guma za WM-Rail

(G 45 10)


zvučno izolacioni uložak za profilne šine

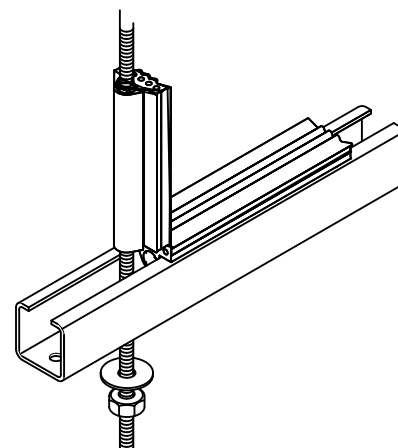

Prednosti i osobine

- zvučno izolacioni gumeni uložak za profilnu šinu
- također se koristi za navojne šipke M6, M8 ili M10
- adekvatna za šina WM0, 1, 15, 2, 30, 35
- materijal: EPDM-guma, crna boja
- building material class B2 according to DIN 4102-1 and class E according to EN 13501-1
- zvučno izolacione osobine po DIN-u 4109

Art.br.	R	L	Za šina	KK	JI
6568001	M6 - M10	30 m	WM0 - 35	30	m.

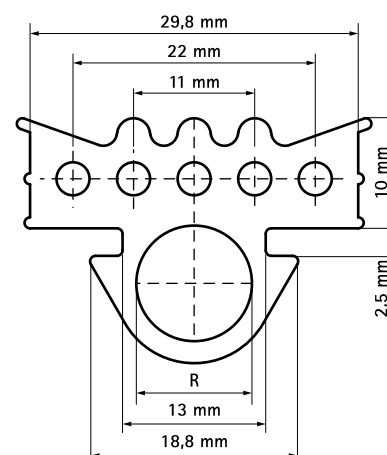

Kompetabilno

BIS RapidRail® Montažna Šina
BIS RapidRail® Konzola (BUP1000)