
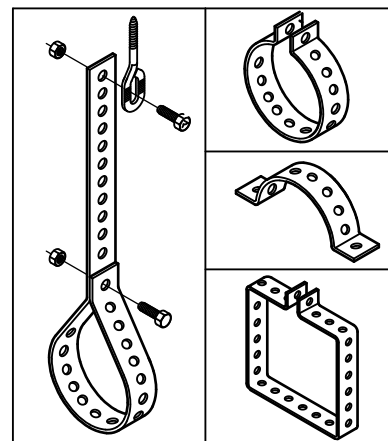


## BIS Traka za montažu – cinkovana

(K 05 05)



za pričvršćivanje cijevi i zračnih kanala

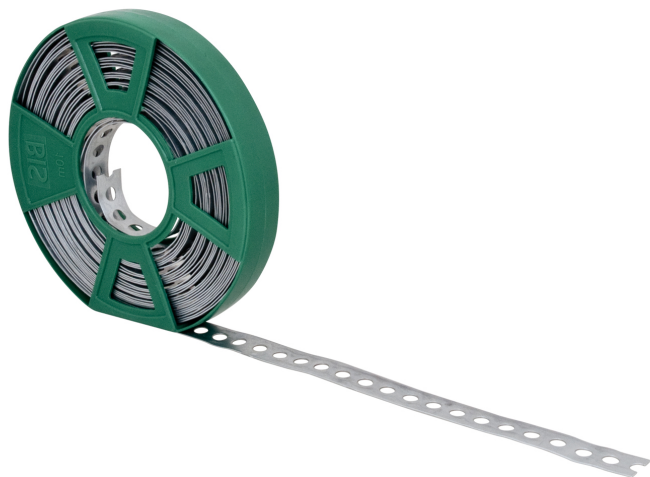

### Prednosti i osobine

- patron otvora na podjednakoj udaljenosti cijelom dužinom trake
- materijal: čelik
- galvanski cinkovan

Art.br.	Tipa	L	b x s (mm)	d1 (mm)	k (mm)	F <sub>a,z</sub> (N)	KK	Jl
0830012	5055	10 m	12 x 1,0	5,0	8,0	1.050	10	kom.
0830017	5055	10 m	17 x 1,0	7,0	12,0	1.500	10	kom.
0830117	5055	10 m	17 x 1,0	6,5	15,0	1.290	10	kom.
0831012	5055L	10 m	12 x 0,8	5,0	8,0	840	10	kom.
0831017	5055L	10 m	17 x 0,8	7,0	12,0	1.070	10	kom.
0831026	5055L	10 m	26 x 1,0	8,5	14,0	2.620	1	kom.

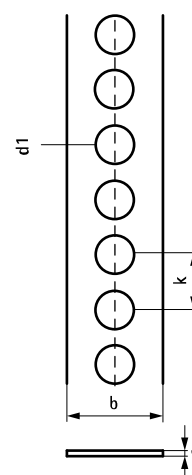

### Kompetabilno

BIS Listasti vijak  
BIS Udarač / klin  
BIS HK