

BISMAT[®] 2000

za metalne cijevi 57 - 219 mm


M8/10 - M10

(A 05 24)



Prednosti i osobine

- dvodijelna obujmica
- sa BISMAT[®] brzim zatvaranjem
- od Ø 159 mm: sa sigurnosnim patentom za zatvaranje
- materijal: čelik
- zvučno izolacione osobine po DIN-u 4109
- noise reduction according to ISO 3822-1 up to 23 dB(A)
- testirano na vatrootpornost, test raport po upitu
- elektrizom cinkovan
- zvučno izolacioni uložak od EPDM-gume, crne boje
- gumeni uložak postojan na starenje

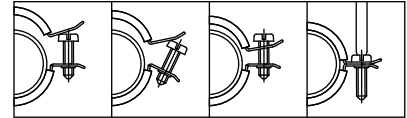


| Art.br. | D (mm) | D (°) | DN | G | B (mm) | H (mm) | h (mm) | b x s (mm) | cs | F _{a,z} (N) | RAL | KK |
|---------|-----------|----------|-----|-------|-----------|-----------|-----------|---------------|----|-------------------------|------------------|----|
| 3403064 | 57 - 64 | 2 | 50 | M8/10 | 107 | 90 | 52 | 23 x 2,00 | M6 | 520 | RAL ² | 50 |
| 3403070 | 64 - 70 | - | - | M8/10 | 115 | 99 | 56 | 23 x 2,00 | M6 | 520 | RAL ² | 50 |
| 3403080 | 73 - 80 | 2½ | 65 | M8/10 | 126 | 109 | 61 | 23 x 2,00 | M6 | 520 | RAL ² | 50 |
| 3403091 | 83 - 91 | 3 | 80 | M8/10 | 137 | 121 | 67 | 25 x 2,50 | M6 | 935 | RAL ² | 25 |
| 3403105 | 100 - 105 | - | - | M8/10 | 152 | 135 | 74 | 25 x 2,50 | M6 | 935 | RAL ² | 25 |
| 3403114 | 108 - 114 | 4 | 100 | M8/10 | 160 | 144 | 79 | 25 x 2,50 | M6 | 935 | RAL ² | 25 |
| 3403119 | 116 - 119 | - | - | M8/10 | 165 | 149 | 81 | 25 x 2,50 | M6 | 935 | RAL ¹ | 25 |
| 3403125 | 122 - 125 | - | - | M8/10 | 173 | 157 | 85 | 25 x 2,50 | M6 | 935 | RAL ¹ | 25 |
| 3403141 | 133 - 141 | 5 | 125 | M8/10 | 189 | 170 | 92 | 25 x 2,50 | M6 | 935 | RAL ¹ | 25 |
| 3423168 | 159 - 168 | 6 | 150 | M10 | 233 | 198 | 102 | 25 x 3,00 | M8 | 1.220 | - | 10 |
| 3423210 | 200 - 210 | - | - | M10 | 273 | 239 | 122 | 25 x 3,00 | M8 | 1.220 | - | 10 |
| 3423219 | 210 - 219 | 8 | 200 | M10 | 284 | 250 | 128 | 25 x 3,00 | M8 | 1.220 | - | 10 |

RAL¹ = testiran, sertifikovan i eksterno kontrolisan prema RAL-GZ 655/B.

RAL² = testiran, sertifikovan i eksterno kontrolisan prema RAL-GZ 655/B i RAL-GZ 656.

Od Ø 159 mm: sa sigurnosnim patentom za zatvaranje.

Za detaljne tehničke informacije o našim proizvodima sa RAL sertifikatom, pogledajte RAL datasheet na našoj veb stranici.

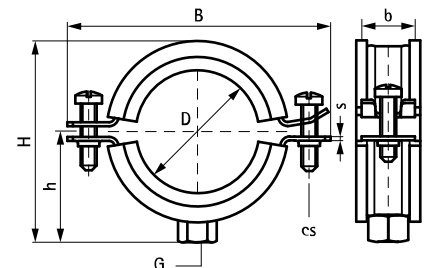

Kompetabilno

- Walraven RapidRail[®] Sistem za pričvršćivanje
- Walraven Dodatci za montažu
- Walraven Dodatci za pričvršćivanje