


BISOFIX® E13 + HD500

(D 03 08)

za rashladne medije 76,1 - 168,3 mm

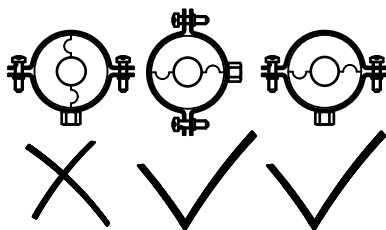

Prednosti i osobine

- for combination with elastomeric foam insulation
- vapourproof glueable with pipe insulation
- insulating pipe support with HD500 clamp
- HD500 clamp with M8/M10 and M10/M12 connection nut
- ne sadrži FCKW, HFCKW, formaldehid ili kadmium supstance
- otpornost na požar klasa: B2
- PIR density for D <80mm = 80kg/m³
- PIR density for D >80mm = 120kg/m³
- zaštita materijala:
 - proizvod je deo Walraven BIS UltraProtect® sistema
 - pogodan za unutrašnju i spoljašnju upotrebu
 - izdržava min. 1 000 sati sonog sprej testa (max. 5% crvene rdje) prema ISO standardu 9227
- temperature range -45 °C - +105 °C

Art.br.	Consists Of	D (mm)	Model	F _{a,z} (N)	KK
I133304076	I130000076 + 33048116	76,1	BISOFIX® E13 + HD500 Clamp	575	25
I133304089	I130000089 + 33048133	88,9	BISOFIX® E13 + HD500 Clamp	875	25
I133304102	I130000102 + 33048140	101,6	BISOFIX® E13 + HD500 Clamp	1.000	25
I133304108	I130000108 + 33048140	108,0	BISOFIX® E13 + HD500 Clamp	1.075	25
I133304114	I130000114 + 33048154	114,3	BISOFIX® E13 + HD500 Clamp	1.250	15
I133304133	I130000133 + 33048169	133,0	BISOFIX® E13 + HD500 Clamp	1.475	15
I133304140	I130000140 + 33048183	139,7	BISOFIX® E13 + HD500 Clamp	1.700	5
I133304160	I130000160 + 33048202	159,0 - 160,0	BISOFIX® E13 + HD500 Clamp	1.950	5
I133304168	I130000168 + 33048202	168,3	BISOFIX® E13 + HD500 Clamp	2.125	5