


## BISOFIX® E32 + 2S

za rashladne medije 12,0 - 140,0 mm

(D 03 40)

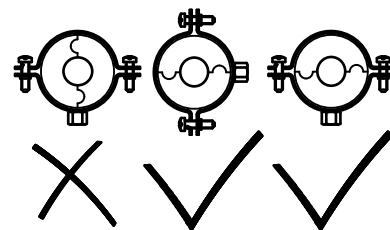

## Prednosti i osobine

- for combination with elastomeric foam insulation
- vapourproof glueable with pipe insulation
- insulating pipe support with 2S clamp
- 2S clamp with M8/M10 connection nut
- ne sadrži FCKW, HFCKW, formaldehid ili kadmium supstance
- otpornost na požar klasa: B2
- PIR density for D <80mm = 80kg/m<sup>3</sup>
- PIR density for D >80mm = 120kg/m<sup>3</sup>
- obujmica elektrolizom cinkovana
- temperature range -45 °C - +105 °C

Art.br.	Consists Of	D (mm)	Model	F <sub>a,z</sub> (N)	KK
I323303012	I320000012 + 33035081	12,0	BISOFIX® E32 + 2S Clamp	100	50
I323303015	I320000015 + 33035081	15,0	BISOFIX® E32 + 2S Clamp	100	50
I323303018	I320000018 + 33035087	17,2 - 18,0	BISOFIX® E32 + 2S Clamp	100	50
I323303022	I320000022 + 33035095	21,3 - 22,0	BISOFIX® E32 + 2S Clamp	100	50
I323303028	I320000028 + 33035103	27,0 - 28,0	BISOFIX® E32 + 2S Clamp	100	50
I323303035	I320000035 + 33035103	33,7 - 35,0	BISOFIX® E32 + 2S Clamp	100	50
I323303042	I320000042 + 33035112	42,4	BISOFIX® E32 + 2S Clamp	150	25
I323303048	I320000048 + 33035118	48,3	BISOFIX® E32 + 2S Clamp	225	25
I323303054	I320000054 + 33035127	54,0	BISOFIX® E32 + 2S Clamp	225	25
I323303060	I320000060 + 33035127	60,3	BISOFIX® E32 + 2S Clamp	350	25
I323303064	I320000064 + 33035153	64,0	BISOFIX® E32 + 2S Clamp	350	15
I323303070	I320000070 + 33035153	70,0	BISOFIX® E32 + 2S Clamp	425	15
I323303076	I320000076 + 33035162	76,1	BISOFIX® E32 + 2S Clamp	575	15
I323303089	I320000089 + 33035183	88,9	BISOFIX® E32 + 2S Clamp	875	5
I323303102	I320000102 + 33035194	102,0	BISOFIX® E32 + 2S Clamp	1.000	5
I323303108	I320000108 + 33035194	108,0	BISOFIX® E32 + 2S Clamp	1.075	5
I323303114	I320000114 + 33035205	114,0	BISOFIX® E32 + 2S Clamp	1.250	5
I323303133	I320000133 + 33035225	133,0	BISOFIX® E32 + 2S Clamp	1.475	5
I323303140	I320000140 + 33035225	140,0	BISOFIX® E32 + 2S Clamp	1.700	5