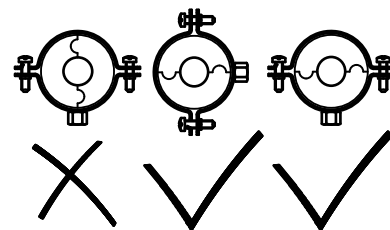
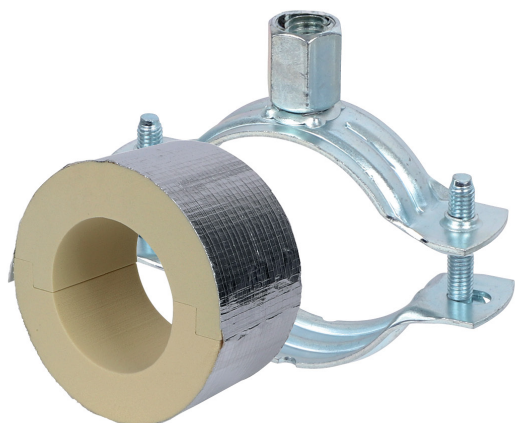


**BISOFIX® PIR20 + 2S**

za rashladne medije 12,0 - 168,3 mm

(D 03 52)

**Prednosti i osobine**

- for combination with rigid foam insulation
- cover joints with aluminium tape
- insulating pipe support with 2S clamp
- 2S clamp with M8/M10 connection nut
- ne sadrži FCKW, HFCKW, formaldehid ili kadmium supstance
- otpornost na požar klasa: B2
- PIR density for  $D < 110\text{mm}$  =  $80\text{kg/m}^3$
- PIR density for  $D > 110\text{mm}$  =  $120\text{kg/m}^3$
- thermal conductivity lambda (approx. value):  $0.30\text{ W/(mK)}$
- obujmica elektrolizom cinkovana
- temperature range  $-45\text{ °C} - +105\text{ °C}$

Art.br.	D (mm)	Model	F <sub>a,z</sub> (N)	KK
I203303012	12,0	BISOFIX® PIR20 + 2S Clamp	120	50
I203303015	15,0 - 16,0	BISOFIX® PIR20 + 2S Clamp	160	50
I203303018	17,2 - 18,0	BISOFIX® PIR20 + 2S Clamp	170	50
I203303022	21,3 - 22,0	BISOFIX® PIR20 + 2S Clamp	180	50
I203303028	26,9 - 28,0	BISOFIX® PIR20 + 2S Clamp	200	50
I203303034	33,7 - 35,0	BISOFIX® PIR20 + 2S Clamp	220	50
I203303042	42,4	BISOFIX® PIR20 + 2S Clamp	280	50
I203303048	48,3	BISOFIX® PIR20 + 2S Clamp	300	50
I203303054	54,0	BISOFIX® PIR20 + 2S Clamp	320	50
I203303057	56,0 - 57,0	BISOFIX® PIR20 + 2S Clamp	330	50
I203303060	60,3	BISOFIX® PIR20 + 2S Clamp	340	50
I203303064	64,0	BISOFIX® PIR20 + 2S Clamp	350	25
I203303070	70,0	BISOFIX® PIR20 + 2S Clamp	370	25
I203303076	76,1	BISOFIX® PIR20 + 2S Clamp	390	25
I203303089	88,9	BISOFIX® PIR20 + 2S Clamp	430	25
I203303102	101,6	BISOFIX® PIR20 + 2S Clamp	450	25
I203303108	108,0	BISOFIX® PIR20 + 2S Clamp	500	25
I203303114	114,3	BISOFIX® PIR20 + 2S Clamp	1.110	15
I203303133	133,0	BISOFIX® PIR20 + 2S Clamp	1.360	5
I203303140	139,7	BISOFIX® PIR20 + 2S Clamp	1.410	5
I203303160	159,0 - 160,0	BISOFIX® PIR20 + 2S Clamp	1.520	5
I203303168	168,3	BISOFIX® PIR20 + 2S Clamp	1.570	5