


## BISOFIX<sup>®</sup> PIR30 + 2S

za rashladne medije 12,0 - 160,0 mm

(D 03 62)

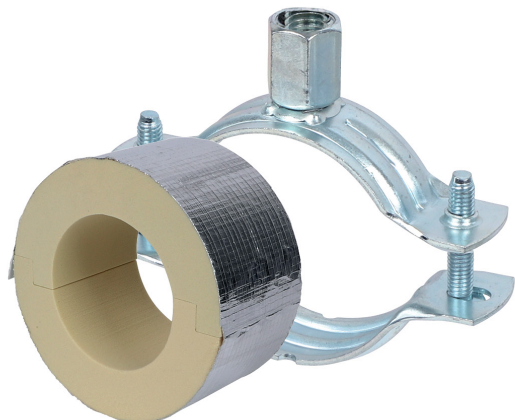

### Prednosti i osobine

- for combination with rigid foam insulation
- cover joints with aluminium tape
- insulating pipe support with 2S clamp
- 2S clamp with M8/M10 connection nut
- ne sadrži FCKW, HFCKW, formaldehid ili kadmium supstance
- otpornost na požar klasa: B2
- PIR density for D <110mm = 80kg/m<sup>3</sup>
- PIR density for D >110mm = 120kg/m<sup>3</sup>
- thermal conductivity lambda (approx. value): 0.30 W/(mK)
- obujmica elektrolizom cinkovana
- temperature range -45 °C - +105 °C

Art.br.	D (mm)	Model	F <sub>a,z</sub> (N)	KK
I303303012	12,0	BISOFIX <sup>®</sup> PIR30 + 2S Clamp	130	50
I303303015	15,0 - 16,0	BISOFIX <sup>®</sup> PIR30 + 2S Clamp	170	50
I303303018	17,2 - 18,0	BISOFIX <sup>®</sup> PIR30 + 2S Clamp	190	50
I303303022	21,3 - 22,0	BISOFIX <sup>®</sup> PIR30 + 2S Clamp	230	50
I303303028	26,9 - 28,0	BISOFIX <sup>®</sup> PIR30 + 2S Clamp	300	50
I303303034	33,7 - 35,0	BISOFIX <sup>®</sup> PIR30 + 2S Clamp	320	50
I303303042	42,4	BISOFIX <sup>®</sup> PIR30 + 2S Clamp	350	50
I303303048	48,3	BISOFIX <sup>®</sup> PIR30 + 2S Clamp	370	25
I303303054	54,0	BISOFIX <sup>®</sup> PIR30 + 2S Clamp	380	25
I303303057	56,0 - 57,0	BISOFIX <sup>®</sup> PIR30 + 2S Clamp	390	25
I303303060	60,3	BISOFIX <sup>®</sup> PIR30 + 2S Clamp	410	25
I303303064	64,0	BISOFIX <sup>®</sup> PIR30 + 2S Clamp	420	25
I303303070	70,0	BISOFIX <sup>®</sup> PIR30 + 2S Clamp	440	25
I303303076	76,1	BISOFIX <sup>®</sup> PIR30 + 2S Clamp	460	25
I303303089	88,9	BISOFIX <sup>®</sup> PIR30 + 2S Clamp	500	15
I303303102	101,6	BISOFIX <sup>®</sup> PIR30 + 2S Clamp	550	15
I303303108	108,0	BISOFIX <sup>®</sup> PIR30 + 2S Clamp	620	15
I303303114	114,3	BISOFIX <sup>®</sup> PIR30 + 2S Clamp	1.370	15
I303303133	133,0	BISOFIX <sup>®</sup> PIR30 + 2S Clamp	1.520	5
I303303140	139,7	BISOFIX <sup>®</sup> PIR30 + 2S Clamp	1.570	5
I303303160	159,0 - 160,0	BISOFIX <sup>®</sup> PIR30 + 2S Clamp	1.720	5