
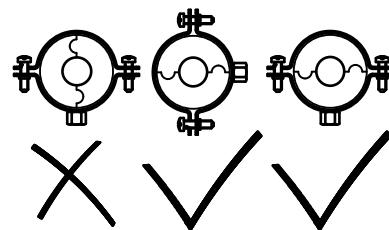


BISOFIX[®] PIR40 + 2S

za rashladne medije 12,0 - 139,7 mm

(D 03 72)

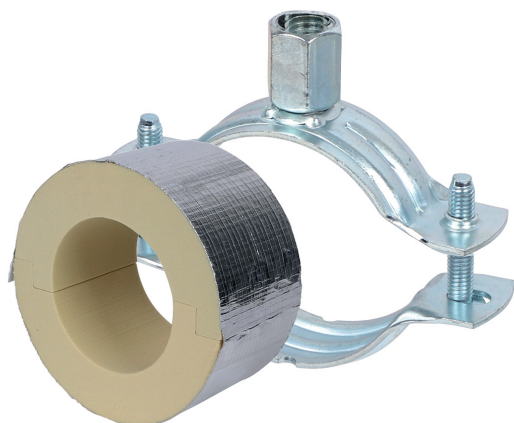

Prednosti i osobine

- for combination with rigid foam insulation
- cover joints with aluminium tape
- insulating pipe support with 2S clamp
- 2S clamp with M8/M10 connection nut
- ne sadrži FCKW, HFCKW, formaldehid ili kadmium supstance
- otpornost na požar klasa: B2
- PIR density for D <110mm = 80kg/m³
- PIR density for D >110mm = 120kg/m³
- thermal conductivity lambda (approx. value): 0.30 W/(mK)
- obujmica elektrolizom cinkovana
- temperature range -45 °C - +105 °C

Art.br.	D (mm)	Model	F _{a,z} (N)	KK
I403303012	12,0	BISOFIX [®] PIR40 + 2S Clamp	300	50
I403303015	15,0 - 16,0	BISOFIX [®] PIR40 + 2S Clamp	320	50
I403303018	17,2 - 18,0	BISOFIX [®] PIR40 + 2S Clamp	340	50
I403303022	21,3 - 22,0	BISOFIX [®] PIR40 + 2S Clamp	350	50
I403303028	26,9 - 28,0	BISOFIX [®] PIR40 + 2S Clamp	350	25
I403303034	33,7 - 35,0	BISOFIX [®] PIR40 + 2S Clamp	370	25
I403303042	42,4	BISOFIX [®] PIR40 + 2S Clamp	410	25
I403303048	48,3	BISOFIX [®] PIR40 + 2S Clamp	430	25
I403303054	54,0	BISOFIX [®] PIR40 + 2S Clamp	440	25
I403303057	56,0 - 57,0	BISOFIX [®] PIR40 + 2S Clamp	460	25
I403303060	60,3	BISOFIX [®] PIR40 + 2S Clamp	470	25
I403303064	64,0	BISOFIX [®] PIR40 + 2S Clamp	490	25
I403303070	70,0	BISOFIX [®] PIR40 + 2S Clamp	510	15
I403303076	76,1	BISOFIX [®] PIR40 + 2S Clamp	530	15
I403303089	88,9	BISOFIX [®] PIR40 + 2S Clamp	620	15
I403303102	101,6	BISOFIX [®] PIR40 + 2S Clamp	650	15
I403303108	108,0	BISOFIX [®] PIR40 + 2S Clamp	690	15
I403303114	114,3	BISOFIX [®] PIR40 + 2S Clamp	1.530	5
I403303133	133,0	BISOFIX [®] PIR40 + 2S Clamp	1.670	5
I403303140	139,7	BISOFIX [®] PIR40 + 2S Clamp	1.730	5