
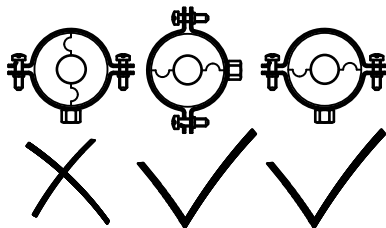


BISOFIX<sup>®</sup> PIR40 + HD500

(D 03 76)

za rashladne medije 76,1 - 323,9 mm



## Prednosti i osobine

- for combination with rigid foam insulation
- cover joints with aluminium tape
- insulating pipe support with HD500 clamp
- HD500 clamp with M8/M10 and M10/M12 connection nut
- ne sadrži FCKW, HFCKW, formaldehid ili kadmium supstance
- otpornost na požar klasa: B2
- PIR density for  $D < 110\text{mm} = 80\text{kg/m}^3$
- PIR density for  $D > 110\text{mm} = 120\text{kg/m}^3$
- thermal conductivity lambda (approx. value):  $0.30\text{ W/(mK)}$
- zaštita materijala:
  - proizvod je deo Walraven BIS UltraProtect<sup>®</sup> sistema
  - pogodan za unutrašnju i spoljašnju upotrebu
  - izdržava min. 1 000 sati sonog sprej testa (max. 5% crvene rdje) prema ISO standardu 9227
- temperature range  $-45\text{ °C} - +105\text{ °C}$

Art.br.	D (mm)	Model	F <sub>a,z</sub> (N)	KK
I403304076	76,1	BISOFIX <sup>®</sup> PIR40 + HD500 Clamp	530	15
I403304089	88,9	BISOFIX <sup>®</sup> PIR40 + HD500 Clamp	620	15
I403304102	101,6	BISOFIX <sup>®</sup> PIR40 + HD500 Clamp	650	15
I403304108	108,0	BISOFIX <sup>®</sup> PIR40 + HD500 Clamp	690	15
I403304114	114,3	BISOFIX <sup>®</sup> PIR40 + HD500 Clamp	1.530	5
I403304133	133,0	BISOFIX <sup>®</sup> PIR40 + HD500 Clamp	1.670	5
I403304140	139,7	BISOFIX <sup>®</sup> PIR40 + HD500 Clamp	1.730	5
I403304160	159,0 - 160,0	BISOFIX <sup>®</sup> PIR40 + HD500 Clamp	2.850	2
I403304168	168,3	BISOFIX <sup>®</sup> PIR40 + HD500 Clamp	2.960	2
I403304219	219,1	BISOFIX <sup>®</sup> PIR40 + HD500 Clamp	4.510	2
I403304273	273,1	BISOFIX <sup>®</sup> PIR40 + HD500 Clamp	5.320	2
I403304324	323,9	BISOFIX <sup>®</sup> PIR40 + HD500 Clamp	6.090	2