


## BISOFIX<sup>®</sup> PIR40

za rashladne medije 12,0 - 406,4 mm


(D 03 70)

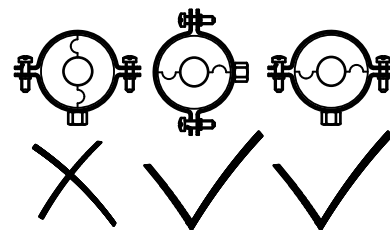

### Prednosti i osobine

- for combination with rigid foam insulation
- cover joints with aluminium tape
- ne sadrži FCKW, HFCKW, formaldehid ili kadmium supstance
- otpornost na požar klasa: B2
- PIR density for  $D < 110\text{mm} = 80\text{kg/m}^3$
- PIR density for  $D > 110\text{mm} = 120\text{kg/m}^3$
- thermal conductivity lambda (approx. value):  $0.30\text{ W/(mK)}$
- temperature range  $-45\text{ °C} - +105\text{ °C}$

Art.br.	D (mm)	D (°)	DN	L	H (mm)	s (mm)	F <sub>a,z</sub> (N)	KK
I40000012	12,0	-	-	75 mm	92,0	40,0	300	25
I40000015	15,0 - 16,0	-	-	75 mm	95,0	40,0	320	25
I40000018	17,2 - 18,0	3/8	10	75 mm	98,0	40,0	340	25
I40000022	21,3 - 22,0	1/2	15	75 mm	102,0	40,0	350	25
I40000028	26,9 - 28,0	3/4	20	75 mm	108,0	40,0	350	25
I40000034	33,7 - 35,0	-	-	75 mm	115,0	40,0	370	25
I40000042	42,4	1 1/4	32	75 mm	122,4	40,0	410	25
I40000048	48,3	1 1/2	40	75 mm	128,3	40,0	430	25
I40000054	54,0	-	-	75 mm	134,0	40,0	440	25
I40000057	56,0 - 57,0	-	-	75 mm	137,0	40,0	460	25
I40000060	60,3	2	50	75 mm	140,3	40,0	470	25
I40000064	64,0	-	-	75 mm	144,0	40,0	490	25
I40000070	70,0	-	-	75 mm	150,0	40,0	510	15
I40000076	76,1	2 1/2	65	75 mm	156,1	40,0	530	15
I40000089	88,9	3	80	75 mm	168,9	40,0	620	15
I40000102	101,6	-	-	75 mm	181,6	40,0	650	15
I40000108	108,0	-	-	75 mm	188,0	40,0	690	15
I40000114	114,3	4	100	100 mm	194,3	40,0	1.530	5
I40000133	133,0	-	-	100 mm	213,0	40,0	1.670	5
I40000140	139,7	5	125	100 mm	219,7	40,0	1.730	5
I40000160	159,0 - 160,0	-	-	100 mm	240,0	40,0	2.850	8
I40000168	168,3	6	150	100 mm	248,3	40,0	2.960	8
I40000219	219,1	8	200	150 mm	299,1	40,0	4.510	2
I40000273	273,1	-	-	150 mm	353,0	40,0	5.320	2
I40000324	323,9	-	-	150 mm	404,0	40,0	6.090	2
I40000406	406,4	-	-	150 mm	486,4	40,0	6.150	2

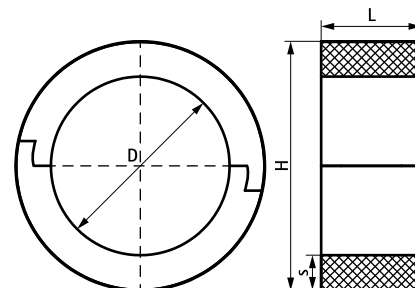

### Kompetabilno

Walraven Extra teške obujmice HD500 (BUP1000)