


Bifix® G2 with Lining (M10) (BUP1000)

(A 05 72)

for steel, copper, cast iron and plastic (multilayer) pipe 192 - 200 mm

M10

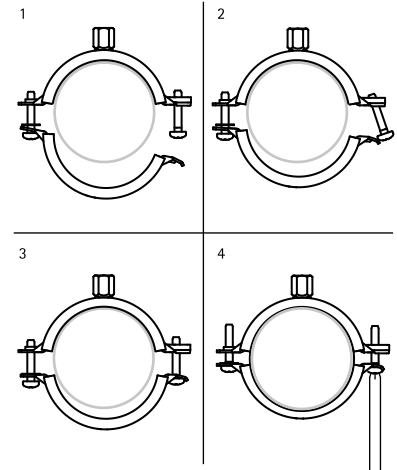

Prednosti i osobine

- dvodijelna obujmica
- quick closing mechanism for easy locking of the clamp with one hand
- 2 component rubber lining provides easy positioning of the pipe during installation
- when the clamp is closed, the pipe rests on soft black rubber lining for increased noise reduction
- materijal: čelik
- postojan na temperaturu od -30 °C do +120 °C
- zvučno izolacione osobine po DIN-u 4109
- noise reduction according to ISO 3822-1 up to 23 dB(A)
- zaštita materijala:
 - proizvod je deo Walraven BIS UltraProtect® sistema
 - pogodan za unutrašnju i spoljašnju upotrebu
 - izdržava min. 1 000 sati sonog sprej testa (max. 5% crvene rdje) prema ISO standardu 9227



Art.br.	D (mm)	D (°)	DN	G	B (mm)	H (mm)	h (mm)	b x s (mm)	cs	F _{a,z} (N)	RAL ¹	KK
31285200	192 - 200	-	-	M10	257	230	119	25 x 2,50	M8	2.500	RAL ¹	15

