

Walraven RapidStrut® Fixing Rail Double (pg)


(H 04 42)

for medium weight fixing applications



Prednosti i osobine

- univerzalni sistem profilnih šina
- patron otvora na podjednakoj udaljenosti cijelom dužinom trake
- velika nosivost i hvat kod nazubljenih bočnih krajeva koji su profilirani na unutrašnju stranu profila
- with sawing marks each 50 mm on both sides
- materijal: čelik 1.0242 (S250GD)
- galvanski cinkovan
- version 62|H Double tested for fire safety
- za više informacija o maks. dozvoljenoj nosivosti ($F_{a,z}$), pogledajte tabelu za nosivost ili naš online datasheet 'Walraven RapidStrut® Datasheet'

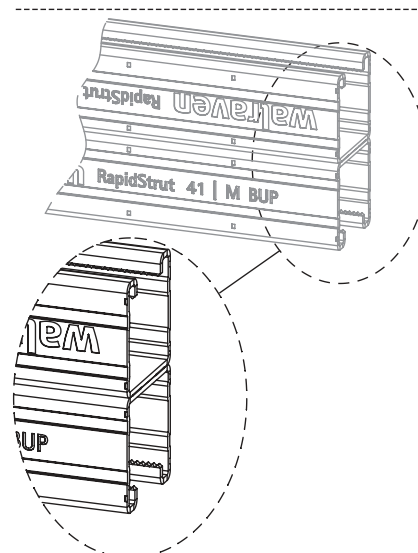


Art.br.	L	B (mm)	H (mm)	s (mm)	S (mm)	KK	Jl
65015626	6 m	41	42 (21 x 2)	2,00	22	150	m.
65015646	6 m	41	82 (41 x 2)	2,00	22	150	m.
65015666	6 m	41	124 (62 x 2)	2,50	22	150	m.

Za više informacija o maks. dozvoljenoj nosivosti ($F_{a,z}$), pogledajte tabelu za nosivost ili naš online datasheet 'Walraven RapidStrut® Datasheet'.



62|H Double only

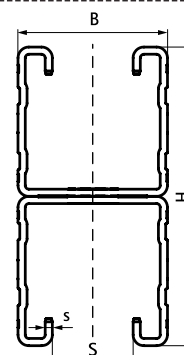

Kompetabilno

Walraven RapidStrut® Klizna navojnica G2 (BUP1000)
Walraven RapidStrut® Hammerfix G2 (BUP1000)

Alternativa

Walraven RapidStrut® Fixing Rail Double (BUP1000)