

# Walraven RapidStrut® Hammerfix G2 (BUP1000)

(H 24 49)

za montažu na profilne šine Strut



## Prednosti i osobine

- klizna navojnica sa navojnim štiftom i BIS RapidStrut® podloškom
- komplet predmontiran dodatak za jednostavniju i bržu montažu
- materijal: metalni dijelovi čelik 1.0332; fleksibilni prsten POM (polyoximethilen), zelena boja
- zaštita materijala:
  - proizvod je deo Walraven BIS UltraProtect® sistema
  - pogodan za unutrašnju i spoljašnu upotrebu
  - izdržava min. 1 000 sati sonog sprej testa (max. 5% crvene rdje) prema ISO standardu 9227




Art.br.	G	L	LU (mm)	s (mm)	SW1 (mm)	T <sub>(inst.)</sub> (Nm)	F <sub>a,z</sub> (N)	F <sub>a,x</sub> (N)	KK	VP
652785804	M8	40 mm	16	6,0	13	11,0	3.120	1.100	15	150
652785805	M8	50 mm	26	6,0	13	11,0	3.120	1.100	15	150
652785806	M8	60 mm	36	6,0	13	11,0	3.120	1.100	5	100
652785808	M8	80 mm	56	6,0	13	11,0	3.120	1.100	5	100
652785810	M8	100 mm	76	6,0	13	11,0	3.120	1.100	5	100
652785004	M10	40 mm	12	8,0	17	15,0	5.000	1.250	15	150
652785006	M10	60 mm	32	8,0	17	15,0	5.000	1.250	5	100
652785008	M10	80 mm	52	8,0	17	15,0	5.000	1.250	5	100
652785204	M12	40 mm	10	9,0	19	22,0	5.000	2.440	5	100
652785206	M12	60 mm	30	9,0	19	22,0	5.000	2.440	5	100

M10 testirane na vatrootpornost prema EN 1366-1.

M12 testirane na vatrootpornost prema EN 1366-1.

Tested values in combination with BIS RapidStrut® Rail 41x41x2,5mm.

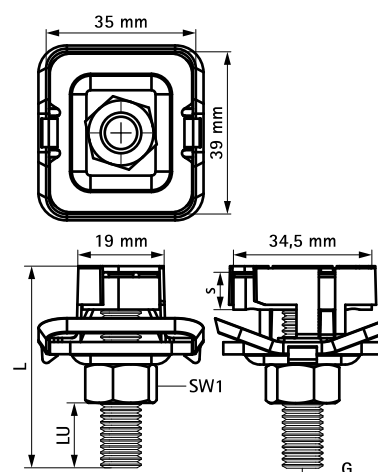

## Kompetabilno

Walraven RapidStrut® Profilna šina DS 5  
(BUP1000)  
Walraven RapidStrut® Konzole (BUP1000)