

Walraven Strut Klizne Navojnice (BUP1000)

(H 24 15)

za montažu na profilne šine Strut



Prednosti i osobine

- za sve modele Strut šine
- za utegnutu montažu dodataka (konektora) na profilnu šinu
- materijal: čelik 1.0332
- zaštita materijala:
 - proizvod je deo Walraven BIS UltraProtect® sistema
 - pogodan za unutrašnju i spoljašnu upotrebu
 - izdržava min. 1 000 sati sonog sprej testa (max. 5% crvene rdje) prema ISO standardu 9227
- testirano na vatrootpornost, test raport po upitu




Art.br.	G	s (mm)	T _(inst.) (Nm)	Za šina	F _{a,z} (N)	F _{a,x} (N)	KK	VP
65188006	M6	5,0	7,0	Strut	2.660	950	100	-
65188008	M8	6,0	25,0	Strut	4.500	2.200	100	1.000
65188010	M10	9,0	40,0	Strut	5.000	2.550	100	500
65188012	M12	9,0	50,0	Strut	5.000	2.950	100	500

M10 testirane na vatrootpornost prema EN 1366-1.

M12 testirane na vatrootpornost prema EN 1366-1.

Tested values in combination with BIS RapidStrut® Rail 41x41x2,5mm.

More details can be found on the Technical Datasheet.

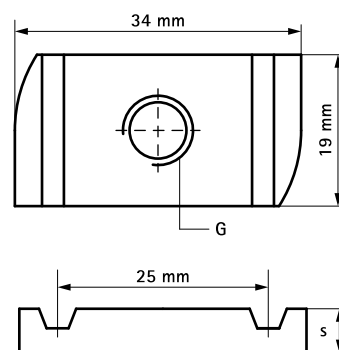

Kompetabilno

Walraven RapidStrut® Konzole (BUP1000)
Walraven RapidStrut® Profilna šina DS 5 (BUP1000)

Alternativa

Walraven RapidStrut® Leptirasta klizna navojnica (BUP1000)