

BIS Vite a testa esagonale - 329

(K 45 20)

614



614 3 6XX




614 3 XXX

Features and benefits

- according to DIN 933
- in acciaio
- materiale: acciaio, classe di resistenza 8.8

Part No.	Type	G	L	s (mm)	Lm1 (mm)	SW1 (mm)	Pack 1
6143816	DIN 933	M8	21,3 mm	5,3	16	13	200
6143820	DIN 933	M8	25,3 mm	5,3	20	13	50
6143825	DIN 933	M8	30,3 mm	5,3	25	13	50
6143830	DIN 933	M8	35,0 mm	5,0	30	13	200
6143835	DIN 933	M8	40,3 mm	5,3	35	13	50
6143860	DIN 933	M8	65,3 mm	5,3	60	13	200
6143880	DIN 933	M8	85,3 mm	5,3	80	13	200
6143925	DIN 933	M10	31,4 mm	6,4	25	17	100
6143930	DIN 933	M10	36,4 mm	6,4	30	17	100
6143935	DIN 933	M10	41,1 mm	6,4	35	17	100
6143940	DIN 933	M10	46,4 mm	6,4	40	17	100
6143950	DIN 933	M10	56,4 mm	6,4	50	17	100
6143980	DIN 933	M10	86,0 mm	6,0	80	17	100
6143990	DIN 933	M10	96,4 mm	6,4	90	17	100

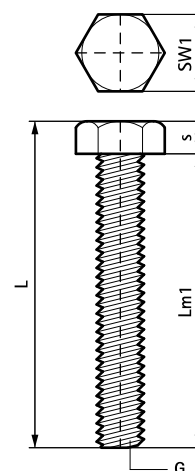

Complementary

- BIS Rondelle - 325
- BIS Dado esagonale - 324
- WDI1 Tassello femmina

Complementary

- WDI1L Tassello femmina con colletto
- WDI1 Utensile di posa
- WBA Tasselli in ottone