



Information and Load Tables

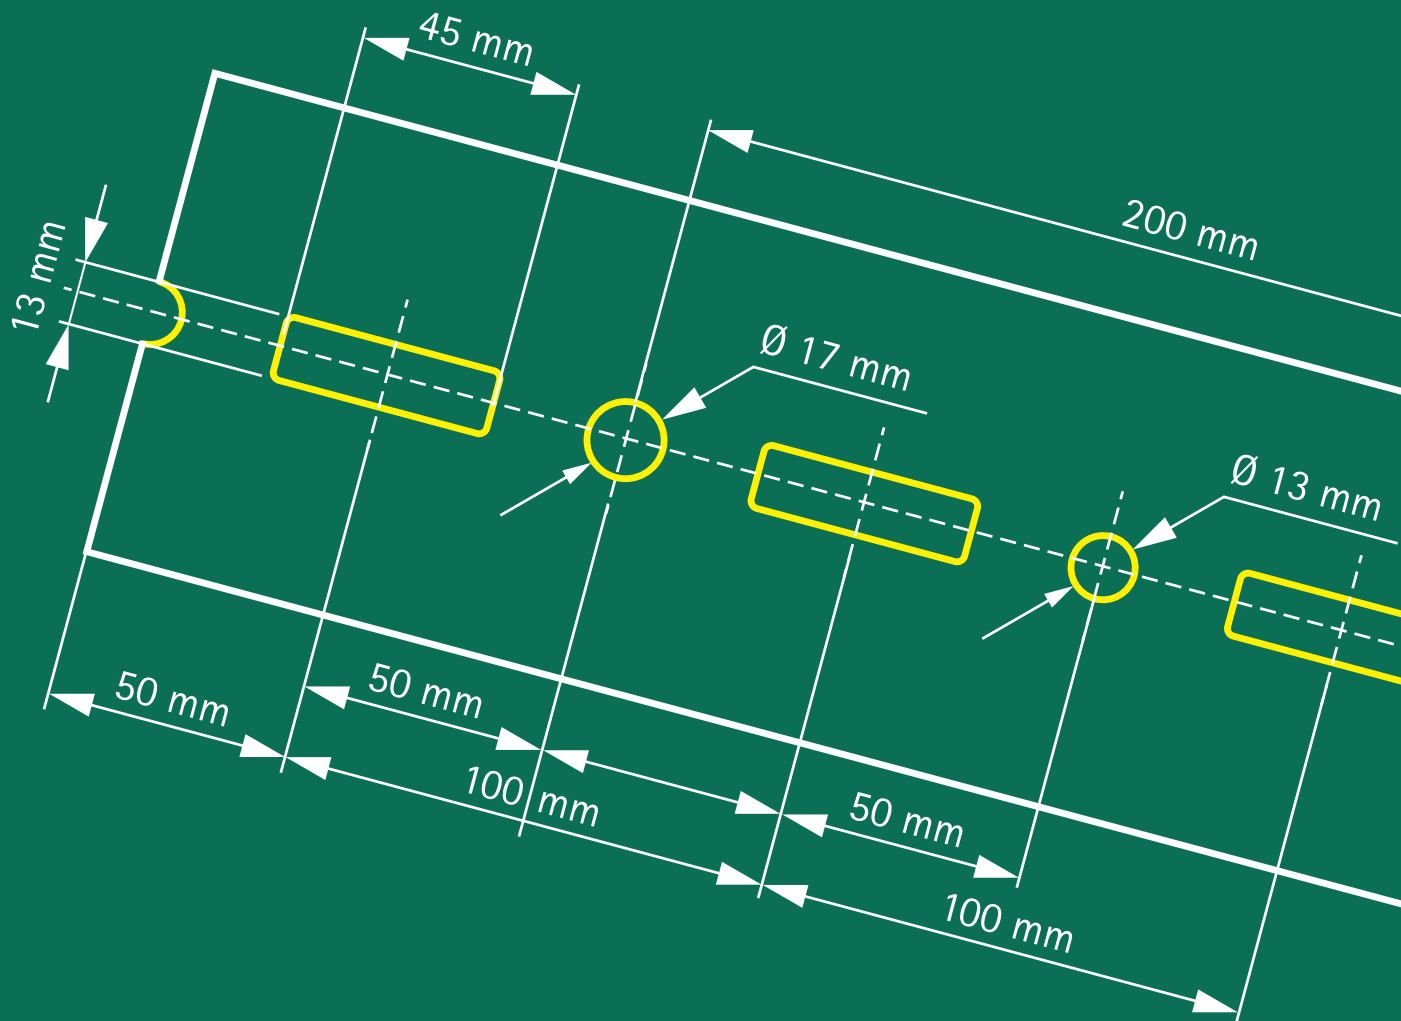

Technical Data Sheet Maxx Heavy Profiles Support System

Maxx Heavy Profiles Support System

Table of rail section properties

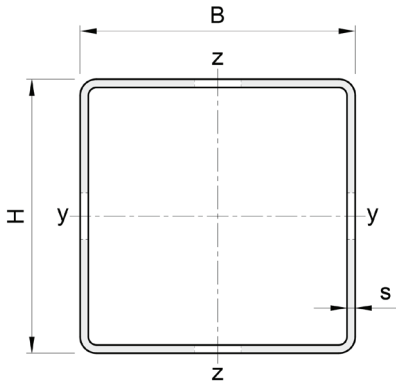


Profile size			Unit Weight	Cross Section Area	Geometrical Moment of Inertia		Geometrical Section Modulus	
H	B	s			I_y	I_z	W_y	W_z
mm	mm	mm	kg	mm ²	cm ⁴	cm ⁴	cm ³	cm ³
80.00	80.00	3.00	6.64	809.02	80.92	80.92	20.23	20.23
100.00	100.00	3.00	8.60	1,049.02	166.13	166.13	33.23	33.22
120.00	100.00	4.00	12.43	1,532.39	327.68	248.97	54.61	49.79
150.00	100.00	4.00	14.38	1,772.36	561.82	304.30	74.91	60.86

Perforation pattern of rails

Distance between rail end and first hole is always equal.

Maxx Profile

- MX80 (80 x 80 x 3 mm)
- MX100 (100 x 100 x 3 mm)
- MX120 (120 x 100 x 4 mm)
- MX150 (100 x 150 x 4 mm)

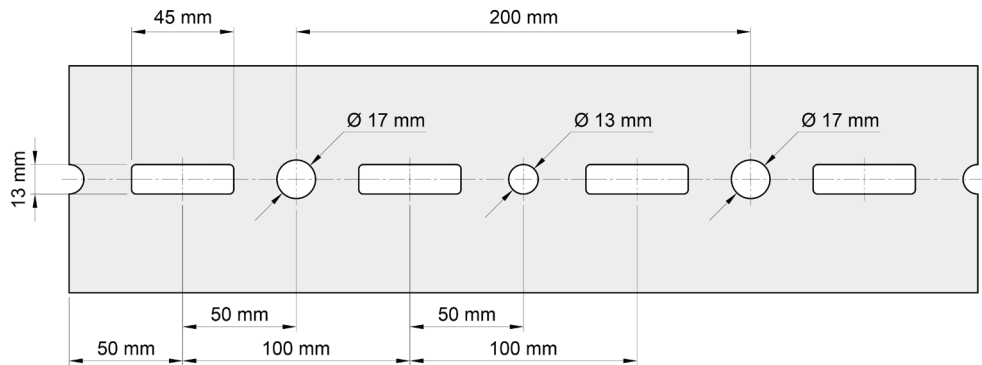

Profile length & Prefab

The standard length of profiles on stock is 6 meters.

Custom length such as shorter or longer profiles up to 8 meters or project specific length can be manufactured on request.

Please contact our Technical Sales Support with such requests.

Calculation method


The published safe working loads are calculated with perforated (slotted) rail.

Loads are calculated with the maximum deflection (f) of $L/200$ (according to RAL-GZ 655/B), safety factor " λ " = 1.54, yield strength $f_y = 235 \text{ N/mm}^2$, E-Module $210,000 \text{ N/mm}^2$.

The weight of the product is always included.

1 N (Newton) = 0.102 kg

1 kg = 9.8 N (Newton)

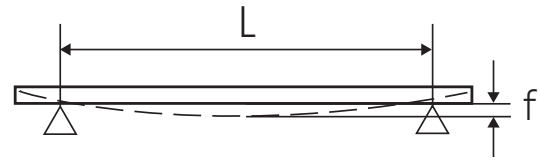

Picture 1


Fixing of rails to walls or ceilings

The strength of the anchoring of the rail is not taken into account.

The installer must verify if the bolts and wall plugs used are suitable when the rail is used under its maximum load.

Reading the rail loading tables

The stated values are only valid for the fixing rail itself (profile safe load table) and for the combination of Baseplate / Profile as cantilever arm application (cantilever arm safe load table). The maximum safe load of all other construction parts has to be verified. The stated maximum safe load is calculated for a static load at free bending support. (see picture 2)

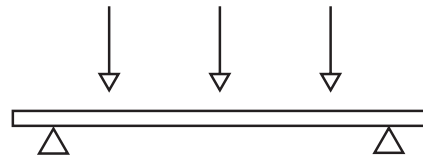

Picture 2


Special conditions

In the case of doubt or special conditions that are not stated in the loading tables, please do not hesitate to contact our Technical Sales Support.


Maxx Heavy Rail Profile MX80

L	Maxx Heavy Rail Profile MX80 (80 x 80 x 3)			
	1 x F	2 x F	3 x F	q
(mm)	(N)	(N)	(N)	(N)
2,000	6,109	4,587	3,054	12,218
2,250	5,415	4,067	2,707	10,830
2,500	4,858	3,650	2,429	9,716
2,750	4,400	3,099	2,200	8,449
3,000	4,018	2,588	1,856	7,055
3,250	3,693	2,188	1,570	5,966
3,500	3,186	1,870	1,341	5,099
3,750	2,747	1,612	1,156	4,396
4,000	2,386	1,400	1,004	3,818
4,250	2,085	1,223	877	3,336
4,500	1,830	1,074	770	2,929
4,750	1,614	947	679	2,582
5,000	1,427	838	601	2,284
5,250	1,266	743	533	2,025
5,500	1,124	660	473	1,799
5,750	999	586	420	1,599
6,000	888	521	374	1,422


Suspension on 1 point




2 equal loads



3 equal loads



Uniformly distributed load



Max. allowed load in N per suspension point (F), or per uniformly distributed load (q).

The stated values are only valid for fixing profile. The maximum safe load of all other construction parts has to be verified.


Maxx Baseplate with Maxx Profile MX80 (Cantilever Arm Application)

L	Maxx Heavy Rail MX80 (80 x 80 x 3)	
	1 x F	q
(mm)	(N)	(N)
500	4,877	9,770
550	4,430	8,878
600	4,058	8,135
650	3,742	7,506
700	3,472	6,967
750	3,237	6,499
800	3,032	6,090
850	2,850	5,729
900	2,689	5,407
950	2,544	5,119
1,000	2,414	4,860
1,050	2,286	4,626
1,100	2,079	4,412
1,200	1,740	4,038
1,300	1,476	3,721
1,400	1,266	3,376
1,500	1,096	2,923


Suspension on 1 point at the end



Uniformly distributed load



Application

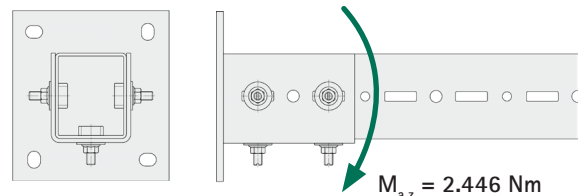

Max. allowed load in N per suspension point (F), or per uniformly distributed load (q).

The stated values are only valid for the cantilever arm application, using Maxx Baseplate and Maxx Profiles, connected by Maxx Hammerfix.


For all load specifications for cantilever arm application, the maximum allowed Moment ($M_{a,z}$) of the Maxx Baseplate was considered with 2.446 Nm.

The maximum safe load of all other construction parts has to be verified.


Maxx Heavy Rail Profile MX100

L	Maxx Heavy Rail Profile MX100 (100 x 100 x 3)			
	1 x F	2 x F	3 x F	q
(mm)	(N)	(N)	(N)	(N)
2,000	10,056	7,549	5,028	20,112
2,250	8,919	6,697	4,459	17,838
2,500	8,007	6,014	4,003	16,014
2,750	7,259	5,453	3,629	14,518
3,000	6,633	4,985	3,316	13,267
3,250	6,103	4,552	3,051	12,206
3,500	5,647	3,903	2,800	10,641
3,750	5,250	3,378	2,423	9,210
4,000	4,901	2,947	2,114	8,035
4,250	4,411	2,589	1,857	7,058
4,500	3,897	2,287	1,641	6,236
4,750	3,460	2,031	1,457	5,536
5,000	3,085	1,811	1,299	4,936
5,250	2,761	1,620	1,162	4,417
5,500	2,477	1,454	1,043	3,964
5,750	2,229	1,308	938	3,566
6,000	2,009	1,179	846	3,215
6,500	1,639	962	690	2,622
7,000	1,339	786	564	2,143
7,500	1,093	641	460	1,748
8,000	886	520	373	1,418


Suspension on 1 point




2 equal loads



3 equal loads



Uniformly distributed load



Max. allowed load in N per suspension point (F), or per uniformly distributed load (q).

The stated values are only valid for fixing profile. The maximum safe load of all other construction parts has to be verified.


Maxx Baseplate with Maxx Profile MX100 (Cantilever Arm Application)

L	Maxx Heavy Rail MX100 (100 x 100 x 3)	
	1 x F	q
(mm)	(N)	(N)
500	6,963	13,947
550	6,325	12,675
600	5,794	11,614
650	5,344	10,717
700	4,959	9,947
750	4,624	9,280
800	4,331	8,696
850	4,072	8,180
900	3,842	7,722
950	3,635	7,311
1,000	3,449	6,941
1,050	3,281	6,607
1,100	3,128	6,302
1,200	2,859	5,769
1,300	2,631	5,317
1,400	2,435	4,929
1,500	2,264	4,592


Suspension on 1 point at the end



Uniformly distributed load



Application

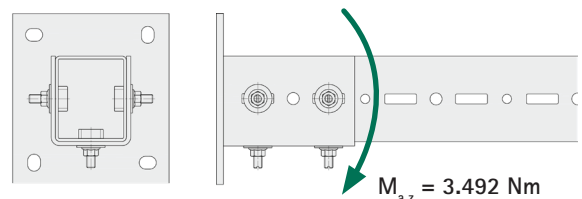

Max. allowed load in N per suspension point (F), or per uniformly distributed load (q).


The stated values are only valid for the cantilever arm application, using Maxx Baseplate and Maxx Profiles, connected by Maxx Hammerfix.

For all load specifications for cantilever arm application, the maximum allowed Moment ($M_{a,z}$) of the Maxx Baseplate was considered with 3.492 Nm. The maximum safe load of all other construction parts has to be verified.


Maxx Heavy Rail Profile MX120

L	Maxx Heavy Rail Profile MX120 (100 x 120 x 4)			
	1 x F	2 x F	3 x F	q
(mm)	(N)	(N)	(N)	(N)
2,000	16,545	12,419	8,272	33,091
2,250	14,678	11,020	7,339	29,356
2,500	13,181	9,898	6,590	26,363
2,750	11,954	8,979	5,977	23,908
3,000	10,928	8,211	5,464	21,857
3,250	10,058	7,560	5,029	20,117
3,500	9,310	7,000	4,655	18,621
3,750	8,660	6,514	4,330	17,321
4,000	8,089	5,879	4,044	16,027
4,250	7,584	5,176	3,713	14,111
4,500	7,133	4,585	3,289	12,500
4,750	6,728	4,083	2,929	11,132
5,000	6,224	3,653	2,621	9,959
5,250	5,591	3,282	2,354	8,946
5,500	5,040	2,958	2,122	8,064
5,750	4,556	2,674	1,918	7,291
6,000	4,130	2,424	1,739	6,608
6,500	3,413	2,003	1,437	5,461
7,000	2,836	1,665	1,194	4,539
7,500	2,364	1,387	995	3,783
8,000	1,970	1,156	829	3,153


Suspension on 1 point




2 equal loads



3 equal loads



Uniformly distributed load




Max. allowed load in N per suspension point (F), or per uniformly distributed load (q).

The stated values are only valid for fixing profile. The maximum safe load of all other construction parts has to be verified.


Maxx Baseplate with Maxx Profile MX120 (Cantilever Arm Application)

L	Maxx Heavy Rail MX120 (100 x 120 x 4)	
	1 x F	q
(mm)	(N)	(N)
500	7,826	15,683
550	7,109	14,252
600	6,511	13,058
650	6,004	12,048
700	5,569	11,181
750	5,192	10,430
800	4,861	9,772
850	4,570	9,191
900	4,310	8,675
950	4,077	8,212
1,000	3,867	7,796
1,050	3,677	7,418
1,100	3,504	7,075
1,200	3,200	6,474
1,300	2,942	5,964
1,400	2,720	5,526
1,500	2,527	5,146


Suspension on 1 point at the end



Uniformly distributed load



Application

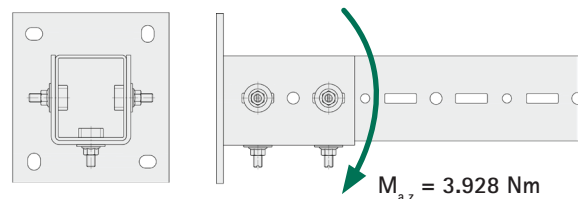

Max. allowed load in N per suspension point (F), or per uniformly distributed load (q).


The stated values are only valid for the cantilever arm application, using Maxx Baseplate and Maxx Profiles, connected by Maxx Hammerfix.

For all load specifications for cantilever arm application, the maximum allowed Moment ($M_{a,z}$) of the Maxx Baseplate was considered with 3.928 Nm. The maximum safe load of all other construction parts has to be verified.


Maxx Heavy Rail Profile MX150

L	Maxx Heavy Rail Profile MX150 (100 x 150 x 4)			
	1 x F	2 x F	3 x F	q
(mm)	(N)	(N)	(N)	(N)
2,000	22,721	17,052	11,360	45,442
2,250	20,163	15,135	10,081	40,326
2,500	18,113	13,599	9,056	36,226
2,750	16,433	12,340	8,216	32,866
3,000	15,029	11,290	7,514	30,059
3,250	13,839	10,398	6,919	27,679
3,500	12,817	9,633	6,408	25,634
3,750	11,928	8,968	5,964	23,857
4,000	11,148	8,385	5,574	22,297
4,250	10,458	7,869	5,229	20,917
4,500	9,843	7,409	4,921	19,687
4,750	9,291	6,996	4,645	18,582
5,000	8,792	6,389	4,396	17,417
5,250	8,339	5,758	4,130	15,696
5,500	7,925	5,209	3,737	14,201
5,750	7,546	4,729	3,392	12,891
6,000	7,197	4,306	3,089	11,738
6,250	6,697	3,931	2,820	10,716
6,500	6,128	3,597	2,580	9,806
6,750	5,619	3,298	2,366	8,991
7,000	5,161	3,029	2,173	8,258
7,250	4,747	2,786	1,999	7,596
7,500	4,372	2,566	1,841	6,996
7,750	4,031	2,366	1,697	6,449
8,000	3,719	2,182	1,565	5,950


Suspension on 1 point




2 equal loads



3 equal loads



Uniformly distributed load



Max. allowed load in N per suspension point (F), or per uniformly distributed load (q).

The stated values are only valid for fixing profile. The maximum safe load of all other construction parts has to be verified.

Find out how we can support you

Would you like to find out more about any of the solutions described in this Technical Data Sheet?
Or would you like to discuss how we could help you find the best possible solution for your project?
Get in touch today!

Walraven International

Industrieweg 5
3641 RK Mijdrecht (NL)
Tel. +31 297 23 30 00
Fax +31 297 23 30 99
export@walraven.com

Walraven Group

Mijdrecht (NL) · Tienen (BE) · Bayreuth (DE) · Banbury (GB) · Malmö (SE) · Grenoble (FR) · Barcelona (ES) · Milan (IT)
Kraków (PL) · Mladá Boleslav (CZ) · Kyiv (UA) · Danville (US) · Shanghai (CN) · Dubai (AE) · Budapest (HU) · Mumbai (IN)
Singapore (SG) · Burlington (CA) · Athens (GR)