


BIS Spiraalbuisbeugel (Aluminium)

(F 15 15)

voor luchtkanalen Ø 80 - 300 mm

M8

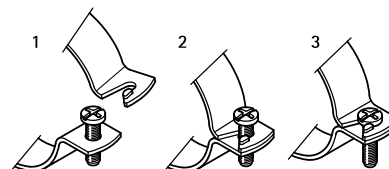


Voordelen en kenmerken

- tweeschroevenbeugel
- met zekerheidssneluiting
- materiaal: aluminium 3.0255

| Art.nr. | D (mm) | G | B (mm) | H (mm) | h (mm) | b x s (mm) | F _{a,z} (N) | VPE 1 |
|---------|-----------|----|-----------|-----------|-----------|---------------|-------------------------|-------|
| 4120080 | 80 | M8 | 127 | 99 | 54 | 25 x 1,5 | 850 | 25 |
| 4120090 | 90 | M8 | 137 | 109 | 59 | 25 x 1,5 | 850 | 25 |
| 4120100 | 100 | M8 | 147 | 119 | 64 | 25 x 1,5 | 850 | 25 |
| 4120110 | 110 | M8 | 158 | 131 | 70 | 25 x 1,5 | 850 | 25 |
| 4120130 | 130 | M8 | 177 | 149 | 79 | 25 x 1,5 | 850 | 25 |
| 4120150 | 150 | M8 | 197 | 169 | 89 | 25 x 1,5 | 850 | 25 |
| 4120180 | 180 | M8 | 227 | 199 | 104 | 25 x 1,5 | 850 | 25 |
| 4120200 | 200 | M8 | 247 | 219 | 114 | 25 x 1,5 | 850 | 25 |

Andere afmetingen op aanvraag.

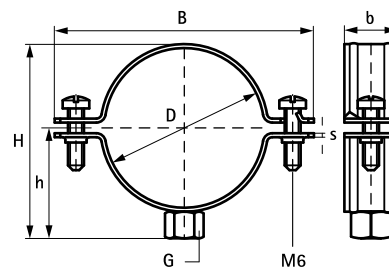

Complementair

- BIS RapidRail® Bevestigingssysteem
- BIS Bevestigingsaccessoires
- BIS Bevestigingsmaterialen