


BIS Bifix[®] 412 Spiraalbuisbeugel

(F 15 05)

voor luchtkanalen Ø 63 - 400 mm


M8

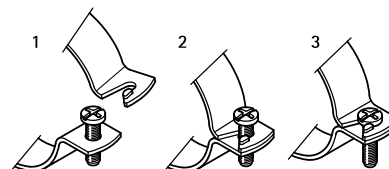

Voordelen en kenmerken

- tweeschroevenbeugel
- met zekerheidssneluiting
- materiaal: staal
- sendzimir verzinkt

Art.nr.	D (mm)	G	B (mm)	H (mm)	h (mm)	b x s (mm)	F _{a,z} (N)	VPE 1
4125080	80	M8	127	99	54	25 x 1,5	850	25
4125100	100	M8	147	119	64	25 x 1,5	850	25
4125112	112	M8	158	131	70	25 x 1,5	850	25
4125125	125	M8	172	144	77	25 x 1,5	850	25
4125130	130	M8	177	149	79	25 x 1,5	850	25
4125150	150	M8	197	169	89	25 x 1,5	850	25
4125160	160	M8	207	179	94	25 x 1,5	850	25
4125180	180	M8	227	199	104	25 x 1,5	850	25
4125200	200	M8	247	219	114	25 x 1,5	850	25
4125225	225	M8	272	244	127	25 x 1,5	850	25
4125250	250	M8	297	269	139	25 x 1,5	850	25
4125280	280	M8	326	299	154	25 x 1,5	850	25
4125300	300	M8	347	319	164	25 x 1,5	850	25
4125315	315	M8	361	334	171	25 x 1,5	850	25
4125400	400	M8	446	419	214	25 x 1,5	850	20

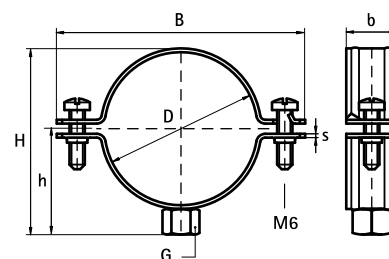

Complementair

- BIS RapidRail[®] Bevestigingssysteem
- BIS Bevestigingsaccessoires
- BIS Bevestigingsmaterialen