

Walraven Vierkantschuifmoer

(G 30 20)


bevestiging aan Walraven RapidRail®



Voordelen en kenmerken

- geschikt voor rail 30x15, 30x20, 30x30, 30x45, 38x40
- materiaal: staal 1.0332
- elektrolytisch verzinkt
- door de vorm borgt de moer zich in de rail

| Art.nr. | G | s (mm) | T _(inst.) (Nm) | Voor rail | VPE 1 | VPE 2 |
|---------|-----|-----------|------------------------------|--|-------|-------|
| 6519910 | M6 | 4,0 | 7,5 | 27x18, 30x15, 30x20, 30x30, 30x45, 38x40 | 50 | 250 |
| 6519911 | M8 | 4,0 | 15,0 | 27x18, 30x15, 30x20, 30x30, 30x45, 38x40 | 50 | 250 |
| 6519912 | M10 | 5,0 | 15,0 | 27x18, 30x15, 30x20, 30x30, 30x45, 38x40 | 50 | 250 |
| 6519913 | M12 | 5,0 | - | 27x18, 30x15, 30x20, 30x30, 30x45, 38x40 | 50 | 250 |

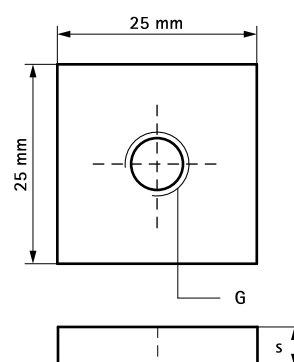

Complementair

Walraven RapidRail® Cantilever Arm
Walraven RapidRail® Montagerail