

BIS Zeskanttapbout

(K 45 20)

614



614 3 6XX




614 3 XXX

Voordelen en kenmerken

- volgens DIN 933
- Art.nr. 61436XX: met zaagsnede
- materiaal: staal, sterkteklasse 8.8
- elektrolytisch verzinkt

Art.nr.	Type	G	L	s (mm)	Lm1 (mm)	SW1 (mm)	VPE 1
6143620	DIN 933	M6	24,0 mm	4,0	20	10	50
6143630	DIN 933	M6	34,0 mm	4,0	30	10	100
6143816	DIN 933	M8	21,3 mm	5,3	16	13	200
6143820	DIN 933	M8	25,3 mm	5,3	20	13	50
6143825	DIN 933	M8	30,3 mm	5,3	25	13	50
6143830	DIN 933	M8	35,0 mm	5,0	30	13	200
6143835	DIN 933	M8	40,3 mm	5,3	35	13	50
6143840	DIN 933	M8	45,0 mm	5,0	40	13	200
6143860	DIN 933	M8	65,3 mm	5,3	60	13	200
6143880	DIN 933	M8	85,3 mm	5,3	80	13	200
6143920	DIN 933	M10	26,4 mm	6,4	20	17	100
6143925	DIN 933	M10	31,4 mm	6,4	25	17	100
6143930	DIN 933	M10	36,4 mm	6,4	30	17	100
6143935	DIN 933	M10	41,1 mm	6,4	35	17	100
6143940	DIN 933	M10	46,4 mm	6,4	40	17	100
6143950	DIN 933	M10	56,4 mm	6,4	50	17	100
6143960	DIN 933	M10	66,0 mm	6,0	60	17	100
6143980	DIN 933	M10	86,0 mm	6,0	80	17	100
6143990	DIN 933	M10	96,4 mm	6,4	90	17	100

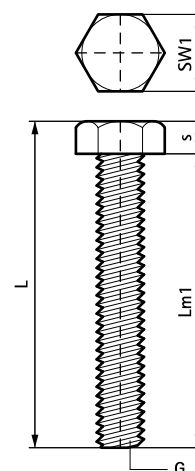

Complementair

BIS Sluistring
BIS Zeskantmoer
WDI1 Inslaganker

Complementair

WDI1L Inslaganker met kraag
WDI1 Zetgereedschap
WBA Messing Inslaganker